

FORM P-1390 (Modified) (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER YAO-4321US	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR To Be Assigned 09/530060	
INTERNATIONAL APPLICATION NO. PCT/JP99/04507		INTERNATIONAL FILING DATE 20/AUG/1999 (20.10.1999)		PRIORITY DATE CLAIMED	
TITLE OF INVENTION RADIANT ENERGY RADIATION APPARATUS					
APPLICANT(S) FOR DO/EO/US Kazuaki OHKUBO; Kenjiro HASHIMOTO; Shiro OTAKE					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input type="checkbox"/> A copy of the International Search Report (PCT/ISA/210). 8. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 9. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 10. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). 11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409). 12. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 					
Items 13 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> 13. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 15. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 16. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 17. <input type="checkbox"/> A substitute specification. 18. <input type="checkbox"/> A change of power of attorney and/or address letter. 19. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail 20. <input checked="" type="checkbox"/> Other items or information: 					
Unexecuted Declaration/Power of Attorney (3 pages)					

423 Rec'd PCT/PTO 21 APR 2000

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) 09/530060 TB# Assigned	INTERNATIONAL APPLICATION NO. PCT/JP99/04507	ATTORNEY'S DOCKET NUMBER YAO-4321US
--	--	---

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **\$970.00**
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **\$840.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$690.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$670.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **\$96.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$840.00

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE			
Total claims	8 - 20 =	0	x \$18.00			\$0.00
Independent claims	2 - 3 =	0	x \$78.00			\$0.00

Multiple Dependent Claims (check if applicable). ☐

\$0.00

TOTAL OF ABOVE CALCULATIONS =

\$840.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

\$0.00

SUBTOTAL =

\$840.00

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

TOTAL NATIONAL FEE =

\$840.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

\$0.00

TOTAL FEES ENCLOSED =

\$840.00

Amount to be:	
refunded	\$
charged	\$

- ☒ A check in the amount of **\$840.00** to cover the above fees is enclosed.
- ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **18-0350** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Andrew L. Ney
 Ratner & Prestia
 P.O. Box 980
 Valley Forge, PA 19482
 (610) 407-0700

Andrew L. Ney

 SIGNATURE
 Andrew L. Ney

 NAME
 20,300

 REGISTRATION NUMBER
 April 21, 2000

 DATE

09/530060

YAO-4321US

PATENT
526 Rec'd PCT/PTO 21 APR 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Kazuaki Ohkubo et al.	: Art Unit:
Serial No.:	To Be Assigned	: Examiner:
Filed:	Herewith	:
For:	RADIANT ENERGY RADIATION APPARATUS :	

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

S I R :

Prior to examination, please amend the above-identified application as follows:


IN THE SPECIFICATION:

After the title and before the first paragraph, insert -- THIS APPLICATION IS A U.S. NATIONAL PHASE APPLICATION OF PCT INTERNATIONAL APPLICATION PCT/JP99/04507. --

IN THE CLAIMS:

Cancel claims 5-16 and 21-31.

Respectfully Submitted,

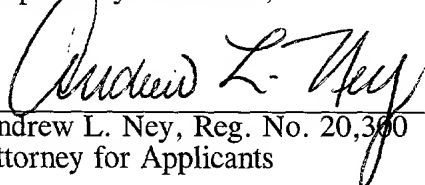

Andrew L. Ney, Reg. No. 20,300
Attorney for Applicants

P.O. Box 980
Valley Forge, PA 19482-0980
(610) 407-0700

The Assistant Commissioner for Patents is hereby authorized to charge payment to Deposit Account No. **18-0350** of any fees associated with this communication.

EXPRESS MAIL Mailing Label Number: EJ914200576US
Date of Deposit: April 21, 2000

I hereby certify that this paper and fee are being deposited, under 37 C.F.R. § 1.10 and with sufficient postage, using the "Express Mail Post Office to Addressee" service of the United States Postal Service on the date indicated above and that the deposit is addressed to the Assistant Commissioner for Patents, Washington, DC 20231.


Kathleen Libby

09/530060

10/PRTS 526 Rec'd PCT/PTO 21 APR 2000

P21059-PO

- 1 -

DESCRIPTION

RADIANT ENERGY RADIATION APPARATUS

5 TECHNICAL FIELD

The present invention relates to a method and apparatus for radiating light (radiant energy) which realizes radiation of light (radiant energy) which is capable of unobtrusively maintaining/promoting biofunctions of a human in daily life.

The present invention further relates to an apparatus for radiating light (radiant energy) which also functions as an illumination apparatus having an ordinary illumination function in addition to the function of radiating light (radiant energy) as described above. The present invention also relates to an apparatus for radiating light (radiant energy) which also functions as a display apparatus having an image display function (display function) in addition to the function of radiating light (radiant energy) as described above (e.g., a display apparatus such as a TV image display apparatus, a computer display apparatus and a video game display apparatus).

25 BACKGROUND ART

In recent years, the social environment around us has an increasing amount of stress factors, e.g., deterioration of the living environment such as the presence of incretion-disturbing substances, a fatigue feeling caused by the increasing commute distance and/or the increasing competition in the market, and information pollution. These not only affect humans but also other organisms such as pets and farm animals by damaging their

P21059-P0

- 2 -

biofunctions and thereby lowering the strength of their immune system and causing autonomic imbalance. Thus, there is a need for means to maintaining/promoting biofunctions of organisms such as humans in the environment in which they live.

Organisms have primarily maintained their biofunctions under sunlight. Accordingly, there have been beliefs that the biofunctions can be maintained/promoted by light irradiation, and it has long been said that daylight is needed for human health. Specifically, it is possible to externally promote an adjustment of the biofunctions if we can effectively stimulate biological sites related to the functions of the autonomic nervous system, the secretion function and the immune function by using near infrared radiation which can permeate into organisms.

However, for illumination in houses and offices, fluorescent lamps have been widely employed for their improved efficiencies. On the other hand, in recent years, workers have been living lives with little exposure to sunlight as their commute distance increases and their offices are moved underground or into tall buildings. Even ordinary people may have little exposure to sunlight during the *Tsuyu* season (during the rainy season) or during winter in high latitude regions.

On the other hand, watching TV, working with a display apparatus of a computer or an information apparatus, and playing a TV game using a display apparatus for a long period of time may cause mental stress in addition to eye fatigue. Such a stress has been known to not only cause mental fatigue but also lower the biofunctions such as the

00530850 070600

- 3 -

P21059-P0

strength of the immune system (Reference 1: Report of Japanese Traffic/Preventive Medicine Research Foundation "Influence of Long Distance Driving and Short Distance Driving on α -wave and NK Cell Activity", 1995).

5

In connection with the above, in recent researches, it has been reported that red light improves the NK (Natural Killer) cell activity which is an important part of the immune system (Reference 2: 19th conference of Japanese Society for Photomedicine and Photobiology, B7-43, "Study on Influence on NK Cell Activity of Irradiation of Forehead with Red-Color Light emitting Diode", 1997, Reference 3: Japanese Laid-Open Publication No. 9-84888 "Non-Invasive Method for Increasing Immunological Surveillance Ability and Device for Irradiating Forehead with Pulsed Light"). It is said that the cause of this phenomenon may be the stimulus by the deeply-permeating red light to a site in the organism related to the immune function such as the hypothalamus in the brain.

20

A NK cell is a cell which has an important roll in the immune system and is an important cell which attacks and kills cancer cells and viruses. However, mental and physical stress and aging reduce the amount and the activity of NK cells, thereby causing tumors and viral infections. Therefore, it is important to maintain/promote NK cell activity in daily life.

25

Particularly, it is expected that the strength of the immune system would be more improved under illumination by light such as sunlight which contains a large amount of red light and near infrared radiation, rather than under fluorescent lamp illumination which does not contain such

30

009020-000550

P21059-P0

- 4 -

radiation. Conversely, it is expected that NK cell activity is reduced over a long period of time if one lives under fluorescent lamp illumination which contains little red light and near infrared radiation without being exposed to sunlight. For example, an aged person who stays in his/her room and watches TV all day, deskwork in the office which involves many hours of computer use, TV games, and the like, is being harmed in terms of the strength of the immune system.

Figure 1 shows a spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for each of the following commonly employed light sources: (a) a three-band type daylight fluorescent lamp; (b) a white light fluorescent lamp; (c) a 60 W silica light bulb; and (d) a light emitting diode (LED) having an emission peak wavelength of 660 nm that is equivalent to that used in Reference 2. Table 1 shows the illuminance (in lx) which is required for each of the above-described four light sources so that the irradiance at a wavelength equal to or greater than 635 nm on the forehead of a subject is equivalent to that shown in Reference 1, i.e., the illuminance (in lx) which is required to obtain an NK cell activity equivalent to that obtained by using an LED in Reference 1. Specifically, Table 1 shows, for each light source, the irradiance at a wavelength in the range of 635 nm to 1000 nm and the illuminance which is required to obtain, with a 30 minute irradiation, an NK cell activity equivalent to that obtained by a 30 minute irradiation at an illuminance of 80 lx by using an LED having an emission peak wavelength of 660 nm. The 635 nm wavelength is a half-width wavelength of the LED having an emission peak wavelength of 660 nm.

P21059-P0

- 5 -

Table 1

Illuminance required to obtain NK activity equivalent to that obtained by using LED		
	Irradiance (635-1000 nm) $\mu\text{W}/\text{cm}^2/1000 \text{ lx}$	Illuminance re- quired for the same irradiance as that obtained by using LED 80 lx
LED (660 nm)	167.3	80 lx (30 min)
Three-band type fluorescent lamp (daylight)	5.2	2574 lx (30 min)
White light fluo- rescent lamp	7.1	1885 lx (30 min)
Silica 60 W	283.2	47 lx (30 min)
635 nm is half-width wavelength of LED 660 nm		

Thus, a fluorescent lamp, either a daylight type fluorescent lamp or a white light type fluorescent lamp, has substantially no radiation at a wavelength equal to or greater than 700 nm, as shown in Figure 1, and cannot provide radiation in a red and near infrared region which provides the above-described desirable effects. The illuminance on a work plane (on a desk) obtained by an office illumination using a fluorescent lamp is typically about 1000 lx. However, as can be seen from Table 1, in order to obtain, by using a fluorescent lamp illumination, a radiation effect in a red and near infrared region (activation of NK cells) equivalent to that obtained by using an LED, the illuminance needs to be equal to or greater than about 2 times the value used in the above-described typical office illumination.

On the other hand, a silica light bulb (incandescent lamp) provides a sufficient radiation in a red and near infrared region, as shown in Figure 1, and thus can provide

009020" 09005560

P21059-PO

- 6 -

an effect of activating NK cells equivalent to that obtained by using an LED at an illuminance lower than that of an LED radiation. However, a silica light bulb has a poor efficiency (illuminance/input power) and is disadvantageous in terms of power conservation, and also has an adverse effect in terms of thermal radiation.

Reference 3 further reports that the effect of increasing the NK cell activity is more pronounced when light from an LED having a wavelength of 660 nm is radiated in a form of pulsed light of 0.5 Hz to 13 Hz for the purpose of inducing α wave. The apparatus arrangement disclosed in Reference 3 is intended to serve as a therapeutic device. As such, it is not a problem to irradiate a human with such red flashing light because the eyes of the human to be irradiated are closed. However, if such a principle (irradiation with red flashing light) is applied to a general purpose illumination apparatus, such a red region flashing frequency is very uncomfortable for a person who lives or works under the illumination, and may possibly cause epileptic seizure.

As described above, with the conventional illumination techniques, it is not possible to obtain a light source which can replace daylight, providing a sufficient radiation in a red and near infrared region which is effective for maintaining/promoting the strength of the immune system. While one may consider arranging a light source to surround a display section (screen) of a display apparatus for the purpose of obtaining a sufficient radiation in a red and near infrared region, such an apparatus arrangement (light source arrangement) is not preferred because it will make the observer uncomfortable

[illegible]

P21059-P0

- 7 -

by causing a glare and will also lower the productivity.

As described above, with the conventional techniques, it is not possible to maintain/improve the NK cell activity of a person who watches TV under an artificial illumination over a long period of time or who does their work using a display, i.e., who cannot be sufficiently exposed to daylight. Therefore, with the conventional techniques, it is not possible to obtain a practical method and apparatus for radiating light (radiant energy) which is capable of maintaining/promoting biofunctions such as immune functions or functions of the autonomic nervous system, which are needed in our living environment with a lot of stress.

15

DISCLOSURE OF THE INVENTION

The present invention has been made to overcome the problems as described above, and has objectives of: (1) providing an apparatus and method for radiating light (radiant energy) which is capable of always realizing a healthy living condition irrespective of the living environment by unobtrusively irradiating in daily life an organism with light (radiant energy) (particularly, radiation in a red to near infrared wavelength range) which maintains/promotes biofunctions; (2) providing an apparatus for radiating light (radiant energy) which also functions as an illumination apparatus having a general illumination function in addition to the light (radiant energy) radiating function as described above; and (3) providing an apparatus for radiating light (radiant energy) which also functions as a display apparatus having an image display function (display function) in addition to the light (radiant energy) radiating function as described above, and

00000000-00000000

P21059-PO

- 8 -

thus is capable of maintaining/improving biofunctions of an organism who watches a display over a long period of time.

5 A radiant energy radiation apparatus of the present invention is a radiant energy radiation apparatus, comprising means for radiating illumination light for an illumination purpose, the illumination light containing radiation in a visible wavelength range and radiation in a predetermined wavelength range which permeates into an
10 organism to maintain/promote biofunctions, thereby achieving the above-described object.

15 Preferably, the predetermined wavelength range is a range of 600 nm to 1100 nm.

For example, the predetermined wavelength range may maintain/promote the biofunctions by increasing a strength of an immune system of the organism.

20 Alternatively, radiation in the predetermined wavelength range may maintain/promote the biofunctions by activating an autonomic nervous system.

25 Radiation means for radiation in a visible wavelength range and radiation means for radiation in the predetermined wavelength range may be integrated together.

30 Alternatively, radiation means for radiation in a visible wavelength range and radiation means for radiation in the predetermined wavelength range may be independently provided from each other.

Preferably, on an irradiated plane to be irradiated

009020"0903560

P21059-P0

- 9 -

with the illumination light, an irradiance at a wavelength in a range of 600 nm to 1100 nm is 0.1 W/m² or more.

Preferably, radiation in the predetermined wave-
length range is radiation in a range of 600 nm to 1100 nm,
and the radiation in the range of 600 nm to 1100 nm is
radiated while being pulse-modulated at 0.5 to 13 Hz.

10 Preferably, on an irradiated plane to be irradiated with the illumination light, radiant energy of radiation at a wavelength in a range of 600 nm to 1100 nm is equal to or greater than 15% of radiant energy of radiation at a wavelength in a visible wavelength range of 380 nm to 780 nm.

15

Preferably, a radiant efficiency of radiation at a wavelength in a range of 600 nm to 1100 nm is equal to or greater than 0.001 W/lm.

20 Preferably, on an irradiated plane to be irradiated with the illumination light, radiant energy of radiation at a wavelength in a range of 1100 nm to 2.5 μ m is smaller than radiant energy of radiation at a wavelength in a range of 600 nm to 1100 nm.

25

Preferably, the illumination light has a color of light which does not cause discomfort, and a deviation (duv) of the chromaticity of light from a Planckian locus in Commission Internationale de l'Eclairage (CIE) 1960 UCS chromaticity diagram is within ± 0.01 .

30

The above-described radiant energy radiation apparatus of the present invention may have a configuration

P21059-P0

- 10 -

of a discharge lamp, a fluorescent discharge lamp, an incandescent lamp, or a light source including a solid light emitting device.

5 Another radiant energy radiation apparatus of the present invention is a radiant energy radiation apparatus, comprising means for radiating radiation in a predetermined wavelength range which has a low visibility for a human and which deeply permeates into an organism to maintain/promote
10 biofunctions, thereby achieving the above-described object.

Preferably, the predetermined wavelength range is a range of 600 nm to 1100 nm.

15

For example, radiation in the predetermined wavelength range may maintain/promote the biofunctions by increasing a strength of an immune system of the organism.

20 Alternatively, radiation in the predetermined wavelength range may maintain/promote the biofunctions by activating an autonomic nervous system.

25 Preferably, on an irradiated plane to be irradiated with radiation, an irradiance at a wavelength in a range of 700 nm to 1100 nm is 0.03 W/m^2 or more.

Preferably, radiation in the predetermined wavelength range is radiation in a range of 700 nm to 1100 nm, and radiation in the range of 700 nm to 1100 nm is radiated while being pulse-modulated at 0.5 to 13 Hz.

Preferably, on an irradiated plane to be irradiated

[illegible]

P21059-P0

- 11 -

with radiation, radiant energy of radiation at a wavelength in a range of 1100 nm to 2.5 μ m is smaller than radiant energy of radiation at a wavelength in a range of 700 nm to 1100 nm.

5 The above-described radiant energy radiation apparatus of the present invention may have a configuration of a discharge lamp, a fluorescent discharge lamp, an incandescent lamp, or a light source including a solid light emitting device.

10

The above-described radiant energy radiation apparatus of the present invention may have an illumination function of providing illumination light for an illumination purpose.

15

Alternatively, the above-described radiant energy radiation apparatus of the present invention may have a display function of displaying a predetermined image. In such a case, for example, the predetermined image may be displayed by the means for radiating radiation in the predetermined wavelength range. Alternatively, display means for displaying the predetermined image may be further provided, and the means for radiating radiation in the predetermined wavelength range may be attached to the display means.

20

25

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for each of the following commonly employed light sources: (a) a three-band type daylight fluorescent lamp; (b) a white light fluorescent lamp; (c) a 60 W silica light bulb; and (d) a light emitting diode

30

00530060-070600

P21059-P0

- 12 -

(LED) having an emission peak wavelength of 660 nm.

5 Figure 2 shows a spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for each of test illumination light (illumination light IL+TR including near infrared radiation, and illumination light FL not including near infrared radiation) used in an experiment conducted by the present inventors.

10

15 Figure 3 shows a spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for each of a three-band type fluorescent lamp (daylight) and a white light fluorescent lamp.

15

20 Figure 4 shows spectroscopic absorption characteristics of the main components of an organism, i.e., water and hemoglobin, in the vicinity of a near infrared wavelength range.

20

25 Figure 5 shows a spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for an MFG fluorescent lamp which is configured according to the present invention.

25

30 Figure 6 shows a spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for an ALF fluorescent lamp which is configured according to the present invention.

30

Figure 7 shows a distribution of relative spectral radiation energies for an MFG fluorescent lamp and an ALF

fluorescent lamp, along with the results for an LED having an emission peak wavelength of 660 nm and a 60 W silica white light bulb.

5 Figure 8 schematically illustrates a configuration of a light radiation apparatus (lighting fixture) which is configured according to the present invention.

Figure 9 schematically illustrates a configuration
10 of a display apparatus which is configured according to the
present invention.

Figure 10 schematically illustrates another configuration of a display apparatus which is configured according to the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

In the course of achieving the present invention, the present inventors examined by way of experiments what differences would occur in the functions of the autonomic nervous system and/or secretory functions of an organism between under illumination light containing near infrared radiation and under illumination light not containing near infrared radiation. Before the detailed description of embodiments of the present invention, the results of the experiments conducted by the present inventors will be discussed below.

30 Illumination light containing near infrared radiation (hereinafter, referred to as "illumination light IL+TR") was produced by an incandescent lamp. The incandescent lamp illumination light (IL) was passed through a heat ray absorbing filter (TR) so as to prevent a thermal

P21059-PO

- 14 -

effect of far infrared radiation contained in the incandescent lamp from influencing an organism. On the other hand, illumination light not containing near infrared radiation (hereinafter, referred to as "illumination light FL") was produced by a fluorescent lamp which can provide illumination light having the same color of light as that of the illumination light containing near infrared radiation ("illumination light IL+TR"). A spectral distribution (the distribution of the relative spectral radiation energies with respect to wavelengths) for each of the test illumination light is shown in Figure 2.

Each of the illumination light FL and the illumination light IL+TR was set so that the illuminance would be about 200 lx on the head of the irradiated subject. This value is within an illuminance range of 150 to 300 lx which is recommended in the Japanese Industrial Standard (JIS) Z9110 "Recommended level of illumination" for conversation/entertainment in a living room.

20 The illumination light IL+TR and the illumination
light FL were switched to each other by changing the light
source of a lighting fixture arranged in the experiment room.
Thus, not only the illuminance and the color of light, but
25 also the surrounding light environment, were set to be the
same between the test illumination light so that it is
possible to extract the influence of the presence/absence
of near infrared radiation on biofunctions.

30 Subjects comprised eight males in their 20's - 50's.
Each subject wearing clothing with his head exposed, entered
the experiment room which was illuminated by a fluorescent
lamp (whose light was not illumination light to be tested.

P21059-P0

- 15 -

but had the same color of light as the illumination light FL and did not contain near infrared radiation), and sat quietly in the room. Then, the blood pressure (highest blood pressure), the heart rate, the noradrenaline concentration in blood, cortisol concentration in blood, and the NK cell activity of the subject were measured. After the measurement, the fluorescent lamp illumination light was turned off, and then the subject was exposed to either one of the test illumination light (the illumination light IL+TR or the illumination light FL). The subject was instructed to sit quietly under the test illumination light for 30 minutes. After 30 minutes, the heart rate, the blood pressure (highest blood pressure), the noradrenaline concentration in blood, cortisol concentration in blood, and the NK cell activity of the subject were measured again.

The above procedure was repeated for different test illumination light, and was repeated for the same subject for repeated measurements. Then, a statistical analysis was performed to determine for each test illumination light the difference between each measurement value before the irradiation with the test illumination light and that after the irradiation with the test illumination light. The results are shown in Table 2.

25

Table 2

	Illumination light FL	Illumination light IL+TR	
Heart rate	1.4±2.0	-3.6±1.5	[beats/min]
Highest blood pressure	-1.6±3.5	-3.8±3.1	[mmHg]
Lowest blood pressure	0.1±3.2	-3.5±1.7	[mmHg]
Noradrenaline concentration in	-30±17	-44±14	[pg/ml]

P21059-P0

- 16 -

blood			
Cortisol concentration in blood	-1.6±0.7	-1.6±0.7	[μg/dl]
NK cell activity	-4.2±1.9	-2.5±1.7	[%]

Table 2 shows that under the illumination light FL, the heart rate and blood pressure (highest blood pressure) before the exposure are not significantly different from those after the exposure. Under the illumination light IL+TR, however, the heart rate and the blood pressure (maximum blood pressure) were significantly reduced by the exposure. While the noradrenaline concentration in blood was reduced by the exposure to either the illumination light IL+TR or the illumination light FL, it was slightly more reduced by the exposure to the illumination light IL+TR than by the exposure to the illumination light FL. The cortisol concentration in blood was reduced by the exposure to either the illumination light IL+TR or the illumination light FL, and there was no significant difference in the level of reduction between the respective illumination light. While the NK cell activity was reduced by the exposure to either the illumination light IL+TR or the illumination light FL, the NK cell activity value after the illumination light IL+TR was slightly higher than that after the illumination light FL.

As described above, the blood pressure and the heart rate were reduced by the exposure to the illumination light IL+TR, suggesting that near infrared radiation might have activated the parasympathetic nerve. Noradrenaline in blood has a function of increasing the heart rate. The greater reduction in the noradrenaline concentration in blood obtained by the exposure to the illumination light IL+TR corresponds to the suppression of the heart rate

P21059-P0

- 17 -

by the irradiation with the illumination light IL+TR.

5 More cortisol is secreted in blood as the stress increases. That there was no difference in the cortisol concentration in blood after exposure between the respective
10 test illumination light suggests that there was no influence of a stress due to a task, or the like, for the respective test illumination light and that the experiment was appropriate. Moreover, since the NK cell activity value was higher for the illumination light IL+TR, it can be said that
15 near infrared radiation has an effect of improving the strength of the immune system.

20 Thus, near infrared radiation is useful in maintaining/promoting biofunctions, e.g., improving the strength of the immune system, activating the functions of the autonomic nervous system, and adjusting the secretion function, and has an effect of increasing the NK cell activity of an organism.

25 Figure 3 shows an example of a spectral distribution for each of a three-band type fluorescent lamp (daylight) and a white light fluorescent lamp, which exemplify general purpose illumination light sources widely used in offices and houses. Either of these fluorescent lamps has substantially no radiation at a wavelength equal to or greater than 635 nm.

30 The illuminance required to obtain an irradiance at a wavelength equal to or greater than 635 nm which is equivalent to that obtained by using the illumination light IL+TR is 3400 lx for illumination light of a three-band type fluorescent lamp and 2700 lx for

000020"00000000

illumination light of a white light fluorescent lamp. Thus, it is required to provide an illuminance that is several times the value (750 to 1500 lx) recommended for the illuminance on a work plane under office illumination according to JIS Z 9110. However, this illuminance is too high for house illumination and unacceptable as it causes adverse influences such as discomfort by a glare, or the like.

On the other hand, an incandescent lamp (silica light bulb) provides a sufficient radiation at a wavelength equal to or greater than 635 nm which is a component of the illumination light IL+TR and corresponds to a red to near infrared region, as already discussed above with reference to Figure 1. However, as described above, a incandescent lamp has a poor efficiency (illuminance/input power) and it generates heat to increase the air conditioning load, thereby hindering energy conservation. Moreover, with an incandescent lamp, far infrared radiation in a range of 1100 nm to 2.5 μ m generates heat, which may even increase the stress on the organism, in which case an incandescent lamp may have a negative effect on the object of maintaining/promoting biofunctions.

As described above, according to the experiments conducted by the present inventors, red and near infrared radiation in a wavelength range of 635 nm to 1100 nm, with which the head was irradiated, permeates into the organism to stimulate sites in the head which are related to the immune function and the functions of the autonomic nervous system. This maintains/promotes biofunctions and improves the NK cell activity of the organism.

The inside of an organism is surrounded by water and

P21059-P0

- 19 -

hemoglobin in blood which respectively have absorption characteristics as shown in Figure 4 with respect to various wavelengths. Therefore, particularly, radiation in a wavelength range of 700 nm to 1100 nm where the absorption of both water and hemoglobin is small (i.e., a wavelength range which serves as a "organism window") more efficiently permeates into the organism to stimulate the hypothalamus in the brain. Moreover, radiation in an infrared wavelength range corresponding to the organism window is hardly perceived by an eye. When light in a visible wavelength range is modulated at a frequency around 10 Hz, as shown in Reference 3, uncomfortable flickering will be perceived which may cause epileptic seizure. On the contrary, when light emitted from a light source in this infrared wavelength range is modulated at a frequency around 10 Hz, as shown in Reference 3, such uncomfortable flickering will not occur.

Thus, according to the present invention, a conventional discharge lamp, a conventional fluorescent lamp, or a conventional illumination apparatus (light radiation apparatus) using the same as its light source, is modified by providing the light source with radiation having a wavelength component in a red to near infrared region which provides the effects as described above, in addition to an emission spectrum (radiation in a visible wavelength range) inherent to the light source itself. Therefore, a person who lives or works under the illumination can be exposed to a sufficient amount of radiation which realizes a sufficient NK cell activity.

Instead of providing the light source itself with radiation having a wavelength component in a red to near

000020"00000000

P21059-P0

- 20 -

infrared region, a separate radiation source having a wavelength spectrum in the red to near infrared region may alternatively be added to the light source (radiation source) for the inherent emission spectrum (radiation in a visible wavelength range). In such a case, similar effects can be obtained also when the light source (radiation source) for radiation in a visible wavelength range and the light source (radiation source) for radiation in a red to near infrared region are arranged, for example, on a wall surface in a room and the opposing wall surface in the room, respectively, or on the ceiling of the room near one wall surface and on the ceiling of the room near the opposing wall surface, respectively.

With any one of the above arrangements, it is possible to provide an organism in daily life with radiation in a wavelength range capable of maintaining/improving biofunctions, e.g., improving the strength of the immune system and activating the functions of the autonomic nervous system, or to maintain/improve the NK cell activity, if the apparatus and method for radiating light (radiant energy) of the present invention is used. The apparatus for radiating light (radiant energy) of the present invention can be configured as a general purpose illumination apparatus. By providing an illumination apparatus having such a configuration, it is possible to, for example, maintain/improve biofunctions or the NK cell activity of a person who inevitably lives or works under an artificial illumination over a long period of time and thus cannot be sufficiently exposed to daylight, or to provide a person always with a sufficient amount of radiation irrespective of the weather, the regionality, the season of the year, etc. Thus, according to the present invention, it is

000028"09085500

P21059-P0

- 21 -

possible to unobtrusively maintain/improve biofunctions or the NK cell activity in daily life with irradiation with light (radiant energy) irrespective of the living environment.

5

Alternatively, it is of course possible to configure a light (radiant energy) radiation apparatus so as to function as a therapeutic device of the present invention.

10

As will be described later in detail, the light source of the present invention may be configured to radiate an alternating or pulsed wave with a frequency of 0.5 Hz to 13 Hz.

15

Alternatively, the light (radiant energy) radiation apparatus of the present invention can be further provided with an image display function (display function) so that it functions as a display apparatus. For example, the light source (light radiation apparatus) of the present invention

20

can be arranged around a screen (display section) of a conventional display apparatus such as a TV or a computer display apparatus, so that it is possible to efficiently irradiate the face of the viewer or the worker with light in a red to near infrared region when they have their face

25

in the vicinity of the screen as they watch TV or do work with the display. Thus, it is possible to maintain/improve the NK cell activity in the body of a person who watches a display over a long period of time, e.g., a person who watches TV or who does OA (Office Automation) work. The

30

location around the screen of a display apparatus where the light source (light radiation apparatus) of the present invention is to be arranged may be in the display section (screen) of the display apparatus or around any other

005020"0905550

P21059-P0

- 22 -

component, e.g., along the frame of the display apparatus or around the screen (display section) of the display apparatus. Alternatively, it is possible to control such radiation by, for example, applying a fluorescent substance having an emission spectrum at a wavelength equal to or greater than 700 nm as a part of the fluorescent substance on the CRT screen of the display so as to emit a signal which radiates light capable of maintaining/promoting biofunctions in combination with a video signal, thereby adding a spectrum in the 700 nm to 1100 nm wavelength range to the emission from the display screen.

The upper limit of the radiation wavelength range is desirably set to be less than or equal to 1100 nm, which is the upper limit of the "organism window" shown in Figure 4. When the illumination light contains far infrared radiation whose wavelength exceeds 1100 nm, the thermal effect of far infrared radiation (a thermal effect occurring due to the optical absorption by water in the body) may cause a stress on the organism, thereby lowering the effect of maintaining/promoting biofunctions. In this regard, the present inventors have experimentally confirmed that a light source not containing radiation of 1100 nm or more has a greater effect of reducing the heart rate than a light source containing radiation in a frequency range of 1100 nm to 2.5 μm . This shows that it is possible to ensure the effect of maintaining/promoting biofunctions by reducing radiant energy in a wavelength range of 1100 nm to 2.5 μm to be, at least, smaller than the effective radiant energy in a wavelength range of 600 nm to 1100 nm.

The lower limit of the radiation wavelength range which exhibits a desirable effect of maintaining/promoting

00530000-070600

P21059-P0

- 23 -

biofunctions is, in principle, 600 nm. As shown in Figure 4, for a wavelength smaller than 600 nm, the absorption by hemoglobin will be substantial, whereby effective radiation cannot be expected. Moreover, in order to configure a practical light source according to the present invention, the radiation wavelength is preferably set to be equal to or greater than 635 nm. An existing three-band type fluorescent lamp contains a large amount of radiation in a wavelength range of 600 nm to 635 nm. Therefore, in order to configure a light source which is distinguished from existing light sources and more effective according to the present invention, it is preferred to set the lower limit of the radiation wavelength to be 635 nm. Moreover, it is said that light at a wavelength of 660 nm has an effect of promoting the strength of the immune system. Therefore, such an effect can be expected by including radiation at this frequency. However, as shown in Figure 4, for a wavelength smaller than 700 nm, the absorption coefficient by hemoglobin is still greater than that for a wavelength in the organism window. Therefore, a radiated energy can be more efficiently absorbed into the organism by using a wavelength range of 700 nm or more.

Figure 4 further shows that particularly for a wavelength range of 800 nm to 1000 nm, the optical absorption coefficient by water and the optical absorption coefficient by hemoglobin are both sufficiently small. This shows that a radiated energy can be more efficiently absorbed into the organism by setting the radiation wavelength in this wavelength range of 800 nm to 1000 nm.

In the case of a color display apparatus, emission in the vicinity of 635 nm is sometimes used to provide a

P21059-P0

- 24 -

strong red color. When red color light in the vicinity of 635 nm is radiated, the effect of maintaining/improving biofunctions can be expected, but the effect may be canceled out by a stress caused by watching such a stimulative red color. Therefore, in order to obtain an effect of non-visible light as in the case of applying the present invention to a display apparatus (when providing the apparatus with a display function), it is possible to use light in a wavelength range of 700 nm to 1100 nm whose visibility is lower than that of a visible range wavelength or which will not be perceived as light, thereby maintaining/promoting biofunctions without the user observing any unusual color.

One way to configure the light (radiant energy) radiation apparatus of the present invention which includes radiant energy in a wavelength range of 600 nm to 1100 nm which has an effect of maintaining/promoting biofunctions, and wherein radiant energy in a wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in a wavelength range of 600 nm to 1100 nm, is to provide radiation in a wavelength range of 600 nm to 1100 nm in the emission spectrum of the light source itself.

Where the light source is a discharge lamp, it is possible to select a substance to be enclosed in the lamp such that radiation in the wavelength range of 600 nm to 1100 nm can be obtained in plasma emission. Even when radiant energy in the wavelength range of 1100 nm to 2.5 μ m is larger than radiant energy in the wavelength range of 600 nm to 1100 nm in the spectral radiant energy distribution of the plasma emission, a light radiation apparatus using the discharge lamp as its light source can

00530060-070600

P21059-P0

- 25 -

be provided with a heat ray absorbing filter attached to the radiation window of the apparatus so that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm on the irradiated plane. A discharge lamp having a better radiant efficiency can be obtained when the discharge lamp itself has radiation in the wavelength range of 600 nm to 1100 nm and has a spectral radiant energy distribution such that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm.

Where the light source is a fluorescent discharge lamp, it is possible to select a fluorescent substance with which radiation in the wavelength range of 600 nm to 1100 nm can be obtained. Moreover, even when the fluorescent substance has a spectral radiant energy distribution such that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is larger than radiant energy in the wavelength range of 600 nm to 1100 nm, a light radiation apparatus using the fluorescent discharge lamp as its light source can be provided with a heat ray absorbing filter attached to the radiation window of the apparatus so that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm on the irradiated plane. A fluorescent discharge lamp having a better radiant efficiency can be obtained when the fluorescent discharge lamp itself has radiation in the wavelength range of 600 nm to 1100 nm and has a spectral radiant energy distribution such that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm.

THE UNIVERSITY OF CHICAGO

P21059-P0

- 26 -

Where the light source is an incandescent lamp, radiant energy in the wavelength range of 1100 nm to 2.5 μ m is typically larger than radiant energy in the wavelength range of 600 nm to 1100 nm, as can be seen from the spectral distribution characteristics described above with reference to Figure 1. Therefore, a light radiation apparatus using an incandescent lamp as its light source requires a configuration on the irradiated plane such that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm. For example, a filter having spectral transmission characteristics such that the amount of radiation in the wavelength range of 600 nm to 1100 nm transmitted is larger than the amount of radiation in the wavelength range of 1100 nm to 2.5 μ m transmitted can be attached to the radiation window of the light radiation apparatus (i.e., a window through which light emitted from the incandescent lamp as a light source is externally output). Alternatively, the spectral radiation spectrum of the incandescent lamp itself can be provided with characteristics such that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm by, for example, employing as a glass forming the bulb of the incandescent lamp a material having spectral transmission characteristics such that the amount of radiation in the wavelength range of 600 nm to 1100 nm transmitted is larger than the amount of radiation in the wavelength range of 1100 nm to 2.5 μ m transmitted, or by providing a multilayer interference film which selectively transmits radiant energy in the wavelength range of 600 nm to 1100 nm on the glass surface.

P21059-P0

- 27 -

Alternatively, similar effects can be obtained also when the light (radiant energy) radiation apparatus is configured with a light source which is a solid light emitting device such as a light emitting diode, a semiconductor laser, an electroluminescence device, and the like, which primarily has radiant energy in the wavelength of 600 nm to 1100 nm. Even when such a device includes a large amount of radiation in the wavelength range of 1100 nm to 2.5 μ m, a light radiation apparatus using such a device as its light source can be provided with a heat ray absorbing filter attached to the radiation window of the apparatus, as described above, so that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm on the irradiated plane.

In the above-described experiments conducted by the present inventors, the irradiance on the irradiated plane in the wavelength range of 635 nm to 1100 nm was 0.63 W/m² for the illumination light IL+TR which exhibited a significant effect of maintaining/promoting biofunctions, and 0.05 W/m² for the illumination light FL which did not exhibit a significant effect. Since the factor of the measurement error due to irradiance variations is at most 2 or less, a light (radiant energy) radiation method capable of providing a significant effect of maintaining/promoting biofunctions can be obtained by setting the irradiance on an organism in the wavelength range 600 nm to 1100 nm to 0.1 W/m² or more, based on the above-described results. It is preferred that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm.

00530800.070600

P21059-P0

- 28 -

In the experiments conducted by the present inventors, in the case where the present inventors attempted to obtain effects by non-visible light radiation, the irradiance on the irradiated plane in the wavelength range of 700 nm to 1100 nm was 0.37 W/m² for the illumination light IL+TR which exhibited a significant effect of maintaining/promoting biofunctions, and 0.017 W/m² for the illumination light FL which did not exhibit a significant effect. In view of these values, it can be seen that a light (radiant energy) radiation method capable of providing a significant effect of maintaining/promoting biofunctions can be obtained by setting the irradiance on an organism in the wavelength range 700 nm to 1100 nm to 0.03 W/m² or more. Again, it is preferred that radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 700 nm to 1100 nm.

The upper limit of the irradiance is set to a limit value of 1×10^5 W/m² with which biological tissues such as the lens and the cornea would not be damaged.

As described above, in order to obtain a light (radiant energy) radiation apparatus capable of providing a significant effect of maintaining/promoting biofunctions, the intensity or the arrangement of the red to near infrared region radiation source is set such that the irradiance on the irradiated plane in the wavelength range of 600 nm to 1100 nm is 0.1 W/m² or more (or the irradiance on the irradiated plane in the wavelength range of 700 nm to 1100 nm is 0.03 W/m² or more). With a radiant energy radiation apparatus having such a configuration, it is possible to maintain/promote biofunctions of an organism irradiated by the apparatus.

P21059-P0

- 29 -

As described above, a visible range wavelength can be added to radiation whose spectral energy distribution on the irradiated plane is such that the irradiance in the wavelength range of 600 nm to 1100 nm is 0.1 W/m² or more (or the irradiance on the irradiated plane in the wavelength range of 700 nm to 1100 nm is 0.03 W/m² or more) and such that radiant energy in the wavelength range of 1100 nm to 2.5 μm is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm. In such a case, it is possible to obtain a light (radiant energy) radiation method capable of providing illumination light while maintaining/promoting biofunctions. A light (radiant energy) radiation apparatus for such light (radiant energy) radiation can be obtained as follows. The light (radiant energy) radiation apparatus is provided with a spectral energy distribution which includes visible light and radiation in a red to near infrared region in the wavelength range of 600 nm to 1100 nm, and configured so as to output radiation light such that radiant energy in the wavelength range of 1100 nm to 2.5 μm is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm. Moreover, the light source is arranged so that at least the irradiance in the wavelength range of 600 nm to 1100 nm on the irradiated plane (e.g., the head, which is the center for maintaining/promoting biofunctions) is 0.1 W/m² or more (or the irradiance on the irradiated plane in the wavelength range of 700 nm to 1100 nm is 0.03 W/m² or more). If necessary, it is possible to increase the number of radiation sources and/or the input power to increase the radiation intensity so as to obtain an irradiance in the above-described range at least on the irradiated plane. A light (radiant energy) radiation apparatus having such a

00530060 070600

5 The recommended illuminance for indoor illumination
is defined in JIS Z 9110, for example, to be 150 lx or more
for conversation/entertainment in a living room. Assuming
that the light loss factor is 70%, radiant energy in the
wavelength range of 600 nm to 1100 nm can be 0.1 W/m² or more
10 with an illuminance equal to or greater than 100 lx if the
radiant energy per unit photometric amount (i.e., the
radiant efficiency) in the wavelength range of 600 nm to
1100 nm is equal to or greater than 0.001 W/lm or more. In
order to realize a light (radiant energy) radiation
15 apparatus having the characteristics as described above,
where the light source is a discharge lamp, a substance to
be enclosed in the lamp can be selected so that the plasma
emission will radiate radiant energy in the wavelength range
of 600 nm to 1100 nm in addition to visible light and that
20 the radiant energy per unit photometric amount in the
wavelength range of 600 nm to 1100 nm is 0.001 W/lm or more.
Where the light source is a fluorescent discharge lamp, it
is possible to select a fluorescent substance such that the
light source will radiate radiant energy in the wavelength
25 range of 600 nm to 1100 nm in addition to visible light and
that the radiant energy per unit photometric amount in the
wavelength range of 635 nm to 1100 nm is 0.001 W/lm or more.
As described above, a heat ray absorbing filter, or the like,
can be used if necessary in order to obtain a desirable
30 spectral radiant energy distribution for either a discharge
lamp or a fluorescent discharge lamp.

For indoor illumination, any uncomfortable color of

[illegible]

P21059-P0

- 31 -

light may cause a stress and adversely affect the biofunctions. This can be avoided by designing the light (radiant energy) radiation method such that: the irradiance on the irradiated plane in the wavelength range of 600 nm to 1100 nm is 0.1 W/m² or more; the radiant energy per unit photometric amount in the wavelength range of 600 nm to 1100 nm is 0.001 W/lm or more; radiant energy in the wavelength range of 1100 nm to 2.5 μm is smaller than radiant energy in the wavelength range of 635 nm to 1100 nm; and a color of light which is not uncomfortable is used. Uncomfortable colors of light include, for example, primary colors such as very strong red or blue. Such color of light should be avoided. A light (radiant energy) radiation apparatus in which the color of light is not uncomfortable can be obtained by: providing the light (radiant energy) radiation apparatus with optical means for correcting the color of light of the light source used; or by suitably selecting a substance to be enclosed in a lamp (in the case of a discharge lamp) or a fluorescent substance (in the case of a fluorescent discharge lamp) so that the light source itself has a color of light which is not uncomfortable. Again, as described above, a heat ray absorbing filter, or the like, can be used if necessary in order to obtain a desirable spectral radiant energy distribution.

For example, as a color of light for indoor illumination, white has been accepted. A person who is in the room would not feel uncomfortable at least by selecting such a color of light. Therefore, a light (radiant energy) radiation method for use in such cases can be obtained by setting the characteristics of radiated light so that: the irradiance on the irradiated plane in the wavelength range of 600 nm to 1100 nm is 0.1 W/m² or more; the radiant energy

P21059-P0

- 32 -

per unit photometric amount in the wavelength range of 600 nm to 1100 nm is 0.001 W/lm or more; radiant energy in the wavelength range of 1100 nm to 2.5 μ m is smaller than radiant energy in the wavelength range of 600 nm to 1100 nm; and the deviation (duv) of the chromaticity of light from a Planckian locus in Commission Internationale de l'Eclairage (CIE) 1960 UCS chromaticity diagram is within ± 0.01 . A light (radiant energy) radiation apparatus in which the chromaticity of the radiated light is within such a range can be obtained by: providing the light (radiant energy) radiation apparatus with optical means for correcting the color of light of the light source used; or by suitably selecting a substance to be enclosed in a lamp (in the case of a discharge lamp) or a fluorescent substance (in the case of a fluorescent discharge lamp) so that the color of light of the light source itself has such a chromaticity. Again, as described above, a heat ray absorbing filter, or the like, can be used if necessary in order to obtain a desirable spectral radiant energy distribution.

20

When the color of light from the light source has a deviation (duv) of the chromaticity of light from a Planckian locus in CIE 1960 UCS chromaticity diagram which is outside the range of +0.01 to -0.01, the difference between the color of light and that of ordinary lighting will be substantial, thereby resulting in an increased discomfort for certain living environments or certain people and thus a stress associated therewith may lower the NK cell activity of the organism. Therefore, the color of light from the light source is preferable set so that the deviation (duv) of the chromaticity of light from a Planckian locus in CIE 1960 UCS chromaticity diagram is within the range of +0.01 to -0.01 (i.e., within ± 0.01), as described above.

In the above description, the value ranges for irradiance on the irradiated plane and the radiant energy per unit photometric amount (i.e., the radiant efficiency) in the wavelength range of 600 nm to 1100 nm have been discussed. For the wavelength range of 700 nm to 1100 nm, the irradiance on the irradiated plane can be set to 0.03 W/m² or more, as described above, whereas the radiant energy per unit photometric amount (i.e., the radiant efficiency) on the irradiated plane can be set to be 0.0003 W/lm or more.

As described above, the method and apparatus for radiating light (radiant energy) of the present invention can provide radiation or illumination light capable of maintaining/promoting biofunctions, e.g., improving the strength of the immune system or activating the functions of the autonomic nervous system. Moreover, the site in the brain which controls the parasympathetic nerve of the autonomic nervous system is different from the site in the brain which controls the sympathetic nerve. Therefore, it is possible to selectively render dominant one of the parasympathetic nerve and the sympathetic nerve by changing the spectral composition, the intensity, the radiation direction, and the like, of the radiated light within the radiation conditions preferred in the present invention.

As described above, the apparatus and method for radiating light (radiant energy) of the present invention can be used to maintain/promote the biofunctions of a human using radiation of light (particularly, radiation in the red to near infrared region) so as to realize a healthier condition. Moreover, the method and apparatus of the present invention can also be used with other animals and/or

155

P21059-P0

- 34 -

plants such as pets and farm animals for the purpose of improving the strength of the immune system and/or activating the functions of the autonomic nervous system.

5 Several embodiment of the present invention will now be described with reference to the accompanying drawings.

(First Embodiment)

10 Figure 5 shows the emission spectrum of a fluorescent lamp which is provided as an exemplary light source to be mounted on a light radiation apparatus (lighting fixture) according to the present invention. The fluorescent lamp is an MFG fluorescent lamp which is provided by mixing a manganese activating magnesium fluorogermanate
15 fluorescent substance ($3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2 \cdot \text{Mn}$, hereinafter referred to as "MFG") with a rare earth fluorescent substance used in conventional three-band type fluorescent lamps, and applying the obtained mixture on the lamp. The MFG fluorescent lamp of the present invention appears to be the
20 same as a conventional fluorescent lamp, but the obtained emission spectrum is different from those of conventional fluorescent lamps.

25 The amount of radiation per unit photometric amount (radiant efficiency) in the wavelength range of 600 nm to 1100 nm of the above-described MFG fluorescent lamp which is obtained according to the present invention is 0.0025 W/lm. Using this MFG fluorescent lamp, the irradiance on the irradiated plane in the wavelength range
30 of 600 nm to 1100 nm can be 0.1 W/m^2 or more by setting the illuminance to be 40 lx or more. When the illuminance is set to be 250 lx or more, effects similar to those obtained by using the above-described illumination light IL+TR can

00530066-070600

P21059-P0

- 35 -

be expected. Moreover, the MFG fluorescent lamp does not have radiation at a wavelength equal to or greater than 1100 nm (far infrared radiation). Therefore, it is possible to prevent the thermal stress caused by far infrared radiation from adversely influencing the effect of maintaining/promoting the biofunctions provided by red to near infrared radiation.

However, the above-described MFG fluorescent lamp also does not include radiation at a wavelength of 700 nm or more. Therefore, the radiant efficiency on the irradiated plane in the wavelength range of 700 nm to 1100 nm is 0.00005 W/lm.

The chromaticity of the color of light provided by the above-described MFG fluorescent lamp is $(x, y) = (0.4485, 0.4172)$, which is within ± 0.01 from the blackbody radiation locus in the CIE 1960 UCS coordinate system. Therefore, the color of light is white, and thus the illumination light will cause no discomfort and will not inhibit the effect of maintaining/promoting biofunctions provided by red to near infrared radiation.

Figure 6 shows the emission spectrum of a fluorescent lamp which is provided as another exemplary light source to be mounted on a light radiation apparatus (lighting fixture) according to the present invention. The fluorescent lamp is an ALF fluorescent lamp which is provided by mixing an iron activating lithium aluminate fluorescent substance ($\text{LiAlO}_2:\text{Fe}$, hereinafter referred to as "ALF") with a rare earth fluorescent substance used in conventional three-band type fluorescent lamps, and applying the obtained mixture on the lamp. The ALF fluorescent lamp of the present

009020"0905560

P21059-P0

- 36 -

invention also appears to be the same as a conventional fluorescent lamp, but the obtained emission spectrum is different from those of conventional fluorescent lamps.

5 The amount of radiation per unit photometric amount
(radiant efficiency) in the wavelength range of 600 nm to
1100 nm of the above-described ALF fluorescent lamp which
is obtained according to the present invention is
0.0012 W/lm. Using this ALF fluorescent lamp, the
10 irradiance on the irradiated plane in the wavelength range
of 600 nm to 1100 nm can be 0.1 W/m² or more by setting the
illuminance to be 80 lx or more. When the illuminance is
set to be 500 lx or more, effects similar to those obtained
by using the above-described illumination light IL+TR can
15 be expected. Moreover, the ALF fluorescent lamp does not
have radiation at a wavelength equal to or greater than
1100 nm. Therefore, it is possible to prevent the thermal
stress from adversely influencing the effect of
maintaining/promoting the biofunctions provided by red to
20 near infrared radiation.

Moreover, the ALF fluorescent lamp has a small
radiation peak in the wavelength range of 700 nm to 900 nm,
and has a radiant efficiency of 0.0011 W/lm in the wavelength
25 range of 700 nm to 1100 nm. Light having a wavelength of
700 nm or more has a visibility which is lower than that
of a visible range wavelength or will not be perceived as
light. Therefore, by using the ALF fluorescent lamp, it is
possible to obtain the above-described effect provided by
30 non-visible light radiation, i.e., the biofunctions can be
maintained/promoted without the user observing any unusual
color.

00530060-070600

P21059-P0

- 37 -

The chromaticity of the color of light provided by the above-described ALF fluorescent lamp is $(x, y) = (0.4485, 0.4172)$, which is within ± 0.01 from the blackbody radiation locus in the CIE 1960 UCS coordinate system. Therefore, the color of the light is white, and thus the illumination light will cause no discomfort and will not inhibit the effect of maintaining/promoting biofunctions provided by red to near infrared radiation.

For comparison purposes, Figure 7 shows the relative spectral radiant energy distributions for the MFG fluorescent lamp and the ALF fluorescent lamp shown in Figures 5 and 6, respectively, along with the distributions for an LED having an emission peak wavelength of 660 nm and for a 60 W silica incandescent lamp which are shown in Figure 1.

Moreover, Table 3 below shows, along with the data shown in Table 1 above, the illuminance (in lx) which is required for each of the above-described MFG fluorescent lamp and ALF fluorescent lamp so that the irradiance at a wavelength equal to or greater than 635 nm on the forehead of a subject is equivalent to that shown in Reference 1, i.e., the illuminance (in lx) which is required to obtain an NK cell activity equivalent to that obtained by using an LED in Reference 1. Specifically, Table 3 shows, as does Table 1, the irradiance for each light source at a wavelength in the range of 635 nm to 1000 nm and the illuminance which is required to obtain, with a 30 minute irradiation, an NK cell activity equivalent to that obtained by a 30 minute irradiation at an illuminance of 80 lx by using an LED having an emission peak wavelength of 660 nm. The 635 nm wavelength is a half-width wavelength of the LED having an

P21059-P0

- 38 -

emission peak wavelength of 660 nm.

Table 3

Illuminance required for ALF and MFG fluorescent lamps to obtain NK activity equivalent to that obtained by using LED		
	Irradiance (635-1000 nm) $\mu\text{W}/\text{cm}^2/1000 \text{ lx}$	Illuminance re- quired for the same irradiance as that obtained by using LED 80 lx
LED (660 nm)	167.3	80 lx (30 min)
ALF fluorescent lamp	26.0	515 lx (30 min)
MFG fluorescent lamp	12.4	1079 lx (30 min)
Three-band type fluorescent lamp (daylight)	5.2	2574 lx (30 min)
White light fluorescent lamp	7.1	1885 lx (30 min)
Silica 60 W	283.2	47 lx (30 min)
635 nm is half-width wavelength of LED 660 nm		

5 Thus, it can be seen that an NK cell activity equivalent to that obtained in Reference 1 by using an LED can be obtained with an illuminance of about 1000 lx for the MFG fluorescent lamp and about 500 lx for the ALF fluorescent lamp.

10

When a general purpose lighting fixture having the above-described MFG fluorescent lamp or ALF fluorescent lamp attached thereto is provided in an office, for example, it is possible to provide a worker working under the illumination with the illuminance required for the work while providing the effect of maintaining/promoting bio-

15

P21059-P0

- 39 -

functions, e.g., activating the functions of the autonomic nervous system or improving the strength of the immune system, thereby eliminating the health condition concern of the worker who has only a little chance to be exposed to daylight.

5

(Second Embodiment)

Next, the second embodiment of the light (radiant energy) radiation apparatus of the present invention will be described, which is obtained by adding, to a general purpose lighting fixture, a radiation source for red to near infrared radiation including a discharge lamp or a light emitting diode in addition to a conventional fluorescent lamp.

15 Figure 8 schematically illustrates a configuration
of a light radiation apparatus (lighting fixture) 1
according to the present embodiment. As shown in Figure 8,
the lighting fixture 1 of the present embodiment includes,
in combination, a ring-shaped fluorescent lamp 2 as an
20 illumination source, and a radiation source 3 for red to
near infrared radiation (hereinafter, referred to as the
"near infrared radiation source 3"). The near infrared
radiation source 3 may be, for example, an infrared light
emitting diode (LED).

25

The wavelength range for red to near infrared radiation from the near infrared radiation source 3 is set to, as described above, 600 nm to 1100 nm in principle, more practically 635 nm to 1100 nm, and more preferably 700 nm to 1100 nm in order to pursue the effects provided by radiation of non-visible light.

As described above with reference to Figure 4, the

P21059-P0

- 40 -

"organism window" exists in the wavelength range of 700 nm to 1100 nm, and light having a wavelength in this range will not be absorbed by water or hemoglobin existing in the organism but rather permeate into the organism efficiently.

5 Particularly, for a wavelength range of 800 nm to 1000 nm in the organism window, the absorption by water and hemoglobin will be significantly reduced, thereby allowing for more effective permeation of light (radiant energy) into the organism.

10

Therefore, the center for controlling biofunctions in the vicinity of the hypothalamus can be more efficiently controlled by using a wavelength range which efficiently permeates into the organism, e.g., light having an emission peak wavelength of 880 nm which is obtained by a light emitting diode made of AlGaAs, instead of light having an emission peak wavelength of 660 nm used in the conventional configuration (Reference 1).

15

20

Herein, light at a wavelength of 880 nm is beyond the sensibility of the human eyes. Therefore, where infrared radiation light from a lighting fixture having this wavelength is localized to a position of a human, or where there is provided a mechanism for tracking a worker with this light, even if the irradiance variations change substantially, the variations and/or fluctuations in the irradiance will not be perceived by a human because a human will not recognize the radiated light itself. Therefore, where light in a visible wavelength range is radiated, variations and/or fluctuations in the irradiance of the radiated light may cause a human or worker (the organism irradiated) to feel uncomfortable. However, such a discomfort will not occur when using illumination light

25

30

00530060.070600

P21059-P0

- 41 -

having such a wavelength.

Thus, by additionally using a light source in which the wavelength of emitted light is within the wavelength band such that the biofunctions can be maintained/promoted by non-visible light, it is possible to obtain a light radiation apparatus and method which does not adversely affect the light environment created by the illumination light and will not cause a problem visually.

10

The present inventors have experimentally confirmed that the parasympathetic nerve is better activated by using illumination light obtained by adding radiation from a light emitting diode having an emission peak wavelength of 880 nm to illumination light from a light bulb color fluorescent lamp, than by using illumination light made solely of the illumination light from the light bulb color fluorescent lamp. The results of the experiments will be discussed below.

20

In the experiments, one male subject who was in his forties was instructed to sit on a chair provided in a booth illuminated by illumination light from a light bulb color fluorescent lamp which provides an on-desk illuminance of 200 lx (hereinafter, referred to as "EX-L illumination light"), and assigned a 20-minute reading task in the booth. The illuminance on the forehead of the subject was 300 lx. The first ten minutes in this reading task were provided for the subject to get accustomed to the EX-L illumination light. During the latter ten minutes in the reading task, the electrocardiogram complex of the subject was measured.

25
30

After the 20-minute reading task under such EX-L

0053060-070600

P21059-P0

- 42 -

illumination light, the subject was instructed to sit on a chair in a booth illuminated by illumination light obtained by adding light radiated from a light emitting diode (LED) made of AlGaAs and having an emission peak wavelength of 880 nm to illumination light from a light bulb color fluorescent lamp which provides an on-desk illuminance of 200 lx (hereinafter, referred to as "+880 nm illumination light"), and assigned a 20-minute reading task in the booth. The illuminance on the forehead of the subject was 300 lx, and the irradiance of radiation from the LED was set to be 1.2 W/m² on the forehead of the subject. As described above, since radiation at a wavelength of 880 nm is in a wavelength range such that it cannot be perceived by human eyes, there is no apparent difference between the EX-L illumination light and the +880 nm illumination light. Again, the first ten minutes in the reading task under the +880 nm illumination light were provided for the subject to get accustomed to the +880 nm illumination light. During the latter ten minutes in the reading task, the electrocardiogram complex of the subject was measured.

Based on the electrocardiogram complex measured as described above, changes in the heart beat of the subject were subjected to a frequency analysis. Among the frequency components of the changes in the heart beat, the high frequency range (HF) of 0.15 to 0.40 Hz reflects the activity of the parasympathetic nerve, and the lower frequency range (LF) of 0.04 to 0.15 Hz reflects the activity of both the sympathetic nerve and the parasympathetic nerve (see, for example, Hiroshi Hayashi ed., "Clinical Application of Changes in the Heart Beat - Physiological Significance, Disease Evaluation, Prognosis -", IGAKUSHOIN, 1999). This shows that when the ratio LF/HF between the integral values

00530050.070600

of the respective frequency bands is large, the sympathetic nerve has a higher activity than the parasympathetic nerve, and when the value LF/HF is small, the parasympathetic nerve has a higher activity than the sympathetic nerve.

5

Based on the results obtained by repeating five times the heart beat measurement according to the above-described measurement procedure, the average value of LF/HF was calculated for each of the illumination light (EX-L illumination light and +880 nm illumination light), thereby obtaining a value 1.91 for the EX-L illumination light and 1.77 for the +880 nm illumination light. Thus, it was confirmed that it was possible to improve the activity of the parasympathetic nerve by using the +880 nm illumination light to which radiation at a wavelength of 880 nm, invisible to human eyes, was added, than by using the EX-L illumination light made solely of the illumination light from the light bulb color fluorescent lamp.

20 (Third Embodiment)

Next, as a light (radiant energy) radiation apparatus according to the third embodiment of the present invention, a configuration of the lighting fixture 1 will now be described, which is obtained by adding, to a general purpose lighting fixture, the radiation source 3 for red or near infrared radiation such as an LED in addition to the illumination fluorescent lamp 2, and in which the on/off control of the added radiation source 3 is performed independently of the control for the illumination fluorescent lamp 2.

The configuration of the lighting fixture of the present embodiment is similar to that of the second

P21059-P0

- 44 -

embodiment shown in Figure 8 except that in the present embodiment, the on/off control of the ring-shaped fluorescent lamp 2 and the on/off control of the near infrared radiation source 3 can be performed independently.

5 Thus, a person who lives or works under the illumination from the lighting fixture 1 of the present embodiment can control the on/off state of radiation so as to maintain/promote their biofunctions. For example, when the person stops working, the person can turn off only the illumination light source (ring-shaped fluorescent lamp) 2
10 so as to receive only infrared radiation from the near infrared radiation source 3 during the break.

As described above with reference to Figure 4, the "organism window" exists in the wavelength range of 700 nm to 1100 nm, and light having a wavelength in this range will not be absorbed by water or hemoglobin existing in the organism but rather permeate into the organism efficiently. Particularly, for a wavelength range of 800 nm to 1000 nm in the organism window, the absorption by water and hemoglobin will be significantly reduced, thereby allowing for more effective permeation of light (radiant energy) into the organism. Therefore, the center for controlling bio-functions in the vicinity of the hypothalamus can be more efficiently controlled by using a light source capable of emitting light in a wavelength range which efficiently permeates into the organism, e.g., a light emitting diode made of AlGaAs which emits light having an emission peak wavelength of 880 nm, instead of an LED emitting light having an emission peak wavelength of 660 nm used in the conventional configuration (Reference 1), as the near infrared radiation source 3 in the lighting fixture 1 of the present embodiment.

P21059-P0

- 45 -

Herein, light at a wavelength of 880 nm is beyond the sensibility of the human eyes. Therefore, where infrared radiation light from a lighting fixture having this wavelength is localized to a position of a human, or where there is provided a mechanism for tracking a worker with this light, even if the irradiance variations change substantially, the variations and/or fluctuations in the irradiance will not be perceived by a human because a human will not recognize the radiated light itself. Therefore, where light in a visible wavelength range is radiated, variations and/or fluctuations in the irradiance of the radiated light may cause a human or worker (the organism irradiated) to feel uncomfortable. However, such a discomfort will not occur when using illumination light having such a wavelength.

In the present embodiment, the visible light source (illumination light source) 2 and the near infrared radiation source 3 can be controlled independently. Alternatively, at least one of the controls can be performed independently. For example, the illuminance for visually perceiving the object to be viewed and the irradiance of near infrared radiation for maintaining/promoting biofunctions can be modulated with one signal by dimming the output from the visible light source 2 and interlocking the output with the output from the near infrared radiation source 3. Alternatively, the output of the visible light source 2 and the output of the near infrared radiation source 3 may be controlled to be inversely proportional to each other. In such a case, when the illuminance is high, the amount of energy consumed may be conserved by primarily using the energy for the visible emission which is required

P21059-P0

- 46 -

to perceived the object to be viewed during work. When the illuminance is low, it is possible to primarily provide near infrared radiation which is required for maintaining/promoting biofunctions so as to ease the person's mind after the work.

In a light illumination apparatus as described above including, in combination, a visible light source and near infrared radiation source, at least one of which can be controlled independently, a control signal for turning on/dimming the light sources can be generated directly or indirectly via an operation section from external information input means such as a switch, a dial, a button, and a keyboard. With such a configuration, the use or operator can suitably set not only the illuminance but also the near infrared radiation irradiance according to the circumstances.

In a light illumination apparatus as described above including, in combination, a visible light source and a near infrared radiation source, at least one of which can be controlled independently, a control signal for turning on/dimming the light sources can alternatively be output based on a predetermined program according to information in the illumination apparatus such as the time or the elapsed time after the light is turned on. With such a configuration used in an office, for example, it is possible to conserve the amount of energy consumed by increasing only the output from the visible light source during working hours, and to maintain/promote biofunctions of people in the office by lowering the output from the visible light source while increasing the output from the near infrared radiation source during breaks. Thus, it is possible to rest more

00530066 090600

P21059-P0

- 47 -

effectively. For either house illumination or office illumination, in places which are inside a building but to which near infrared radiation included in direct/indirect light from the sun can reach, it is possible to output only
5 visible light required for visually perceiving the object to be viewed during the daytime and to output near infrared radiation only at night.

In a light illumination apparatus as described above
10 including, in combination, a visible light source and a near infrared radiation source, at least one of which can be controlled independently, the control signal for turning on/dimming the light sources may need to be generated based on both the external information and the internal
15 information. This can be achieved by providing a determination section in which a program has previously been incorporated for determining whether the independent on/off control signal should be generated based on the signal from the external information input means or the signal from the
20 internal information. For example, in places which are inside a building but to which near infrared radiation included in direct/indirect light from the sun can reach, there may be cases where it is desired to output near infrared radiation even when near infrared radiation should not be
25 necessary (e.g., during the daytime) based on the internal information (time), e.g., when the window surface is covered with a shield such as a curtain or when it is desired to increase the potential effect of maintaining/promoting biofunctions. In such a case, near infrared radiation can
30 be output by giving the control based on the external information (a signal from a switch, or the like) a higher priority.

00530000.070600

P21059-P0

- 48 -

5 The threshold value used to determine whether or not
to generate a control signal for turning on/dimming the light
source based on the internal information or the external
information can be previously, i.e., during the manufacture,
set by the manufacturer of the lighting fixture. Moreover,
where the threshold value can be reset to a different value,
the user can change the threshold value as necessary so as
to configure the lighting fixture which can accommodate the
user's convenience or any circumstances. The threshold
10 value can be automatically changed based on learning by an
algorithm, e.g., the fuzzy theory, using the history of the
external information and the internal information. In such
a case, it is possible to realize a convenient lighting
fixture with which the user does not have to do any operation
15 of changing the settings.

20 The configuration of the light (radiant energy)
radiation apparatus according to the present invention which
is capable of rendering the parasympathetic nerve dominant
can be used, for example, for illumination in the bedroom.
The apparatus can be used before a person in the bedroom
goes to sleep when radiation includes visible light, and
the apparatus can be used after the person goes to sleep
when radiation includes only near infrared radiation. In
25 either case, the use of the apparatus can reduce the heart
rate by activating the parasympathetic nerve, thereby
allowing the person to sleep well.

30 Alternatively, the configuration of the light
(radiant energy) radiation apparatus according to the
present invention which is capable of rendering the
parasympathetic nerve dominant, can be used, for example,
for illumination in the dining room. In such a case, it is

00530060.070600

P21059-P0

- 49 -

possible to promote secretion of digestive fluid by activating the parasympathetic nerve, while illuminating food with visible light. Alternatively, the configuration of the light (radiant energy) radiation apparatus according to the present invention which is capable of rendering the parasympathetic nerve dominant, can be used for example, for illumination in the rest room. In such a case, it is possible to promote peristalsis of the intestines by activating the parasympathetic nerve, thereby allowing for smooth excretion, while providing visible light. Alternatively, the configuration of the light (radiant energy) radiation apparatus according to the present invention which is capable of rendering the parasympathetic nerve dominant, can be used for example, for illumination in the bathroom. In such a case, it is possible to suppress the heart rate by activating the parasympathetic nerve, thereby mentally and physically relaxing a person in the bathroom in addition to relaxation effects from bathing, while providing visible light.

Alternatively, the configuration of the light (radiant energy) radiation apparatus according to the present invention which is capable of rendering the sympathetic nerve dominant, can be used for example, for illumination in the kitchen. In such a case, it is possible to increase the vigilance of a person in the kitchen by activating the sympathetic nerve, thereby increasing the safety for the use of knives and fire, while providing visible light. Alternatively, the configuration of the light (radiant energy) radiation apparatus according to the present invention which is capable of rendering the sympathetic nerve dominant, can be used for example, for illumination of roads and streets. In such a case, it is

00530600.070600

P21059-PO

- 50 -

possible to increase the vigilance of a person on a road or a street by activating the sympathetic nerve, thereby allowing the person to make quick determinations for avoiding dangers from obstacles while providing visible light. Alternatively, the configuration of the light radiation apparatus according to the present invention which is capable of rendering the sympathetic nerve dominant, can be incorporated for example, in the headrest of a driver's seat of a car. In such a case, it is possible to increase the vigilance of the driver by activating the sympathetic nerve, thereby allowing the driver to make quick determinations for avoiding dangers from obstacles. Alternatively, the configuration of the light radiation apparatus according to the present invention which is capable of rendering the sympathetic nerve dominant, can be used, for example, in an alarm clock. In such a case, it is possible to waken the user of the alarm clock quickly by activating the sympathetic nerve.

The light (radiant energy) radiation apparatus according to the present invention can be used in a discharge lamp or a fluorescent discharge lamp having radiant energy of a predetermined wavelength which provides desirable effects, e.g., those in a range of 600 nm (or 635 nm) to 1100 nm. Alternatively, the light (radiant energy) radiation apparatus may be provided in the form of a discharge lamp or a fluorescent discharge lamp in which radiant energy in the wavelength range of 600 nm (or 635 nm) to 1100 nm is equal to or greater than 15% of radiant energy in a visible wavelength range of 380 nm to 780 nm. With such a discharge lamp or a fluorescent discharge lamp having such features as described above, the characteristics of radiated light can be set so that the deviation (duv) of the

000020"0000500

P21059-P0

- 51 -

chromaticity of light from a Planckian locus in CIE 1960 UCS chromaticity diagram is within ± 0.01 in order to ensure that the color of light would not be uncomfortable, as described above. Alternatively, the characteristics of radiated light can be set so that: in the emission spectrum, radiant energy in a wavelength range of 700 nm to 1100 nm, which deeply and efficiently permeates into an organism thereby providing an effect of improving the strength of the immune system and/or activating the autonomic nervous system, is equal to or greater than 15% of radiant energy in a visible wavelength range of 380 nm to 780 nm; and the deviation (duv) of the chromaticity of light from a Planckian locus in CIE 1960 UCS chromaticity diagram is within ± 0.01 in order to ensure that the color of light would not be uncomfortable.

In the light (radiant energy) radiation apparatus and method of the present invention, radiant energy in the wavelength range as described above in the foregoing embodiments may be radiated in the form of an alternating or pulsed wave with a frequency of 0.5 Hz to 13 Hz. In such a case, the configuration of the light (radiant energy) radiation apparatus may be similar to that described above in the third embodiment with reference to Figure 8, for example.

When radiation in a near infrared wavelength range is provided by alternating or pulsed light, as described above, the center for controlling biofunctions in the vicinity of the hypothalamus can be more efficiently controlled by using a wavelength range which efficiently permeates into the organism, e.g., light having an emission peak wavelength of 880 nm which is obtained by a light

005020-0300550

P21059-P0

- 52 -

emitting diode made of AlGaAs, instead of light having an emission peak wavelength of 660 nm used in the conventional configuration (Reference 1), in view of the presence of the "organism window" wavelength range described above with reference to Figure 4. Since this wavelength range is beyond the sensibility of the human eyes, infrared radiation in this wavelength range will not cause flickering or a discomfort.

10 Radiation in the near infrared wavelength range can
be provided in the form of alternating or pulsed light, as
described above, with a discharge lamp or a fluorescent
discharge lamp in which radiant energy of a predetermined
wavelength which provides desirable effects, e.g., those
15 in a range of 600 nm (or 635 nm) to 1100 nm, is equal to
or greater than 15% of radiant energy in a visible wavelength
range of 380 nm to 780 nm. With such a discharge lamp or
a fluorescent discharge lamp having such features as de-
scribed above, the characteristics of radiated light can
20 be set so that the deviation (duv) of the chromaticity of
light from a Planckian locus in CIE 1960 UCS chromaticity
diagram is within ± 0.01 in order to ensure that the color
of light would not be uncomfortable, as described above.

Moreover, it is easy to turn on infrared radiation for maintaining/improving NK cell activity and/or biofunctions only during a predetermined or desired period of time by separately providing a light source for the visible wavelength range and a light source for the infrared range so that the respective on/off controls of the light sources are independently performed.

In the above description of the second and third

P21059-P0

- 53 -

embodiments of the present invention, with respect to the configuration in which the light source (radiation source) 2 for radiation in the visible wavelength range and the light source (radiation source) 3 for radiation in the red to near infrared region are separately provided, the two light sources (radiation sources) 2 and 3 are attached to the same body. However, the configuration of the present invention is not limited to such a particular configuration. Similar effects are obtained in cases as follows. For example, the light source (radiation source) 2 for radiation in the visible wavelength range may be provided on a wall surface in the room, while providing the light source (radiation source) 3 for radiation in the red to near infrared region on the opposing wall surface in the room. Alternatively, the light source (radiation source) 2 for radiation in the visible wavelength range may be provided on the ceiling near a wall surface in the room, while providing the light source (radiation source) 3 for radiation in the red to near infrared region on the ceiling near the opposing wall surface in the room.

(Fourth Embodiment)

The fourth embodiment of the present invention will now be described. In the fourth embodiment, the light (radiant energy) radiation apparatus of the present invention as described above in the foregoing embodiments is provided with an image display function. The fourth embodiment provides a display apparatus which is obtained by using the function of radiating light (radiant energy) according to the present invention.

The display apparatus applications to which the present invention can be applied include, for example, a

000020"0000560

P21059-P0

- 54 -

computer display apparatus, a game display apparatus, or a TV image display apparatus, and the like. A light source (radiation source of radiant energy) for irradiating a viewer of the display screen (e.g., a person who does work with a computer while watching the display screen) with light (more generally, radiant energy) in the above-described red to near infrared wavelength range can be provided along the frame or around the display section of such apparatuses. In such a case, it is possible to expose the viewer watching the display screen to the red to near infrared radiation, thereby maintaining/promoting the biofunctions of the viewer.

More specific exemplary configurations of such apparatuses will be described below with reference to the accompanying drawings. Figure 9 shows a display apparatus 10 according to the present embodiment which includes an ordinary display section 11 and a red to infrared radiation source 12 (referred to as the "near infrared radiation source 12"), e.g., a light emitting diode (LED), or the like, mounted on top of the ordinary display section 11. Again, the center for controlling biofunctions in the vicinity of the hypothalamus can be more efficiently controlled by using an LED emitting light in a wavelength range which efficiently permeates into the organism, e.g., an LED made of AlGaAs, instead of an LED emitting light having an emission peak wavelength of 660 nm used in the conventional configuration (Reference 1), as the near infrared radiation source 12. Since this wavelength range is beyond the sensibility of the human eyes, near infrared radiation in this wavelength range will not be a source of an uncomfortable glare, and will not cause flickering or a discomfort.

P21059-PO

- 55 -

Alternatively, the MFG fluorescent lamp described above in the first embodiment or the ALF fluorescent lamp described above in the second embodiment can be used as the above-described near infrared radiation source 12. For example, the ALF fluorescent lamp, whose main emission wavelength range is 700 nm to 800 nm, can be used to replace the above-described AlGaAs LED.

10 The near infrared radiation source 12 may be configured so that the near infrared radiation source 12 can be turned on independently of the display section 11, and the user can turn on the near infrared radiation source 12 when necessary.

15 Next, Figure 10 shows another display apparatus 20 of the present embodiment which has a different configuration. The display apparatus 20 includes an ordinary display section 21 and a near infrared radiation source 22, e.g., an LED, provided on top of the ordinary display section 21. The display apparatus 20 further includes an infrared sensor 23 for detecting radiation from the near infrared radiation source 22 which is reflected by a viewer 24 who watches the display or works with the display. Based on the outputs from the infrared sensor 23, the irradiance of infrared radiation on the viewer 24 is obtained. The radiation output power of the near infrared radiation source 22 can be adjusted based on the obtained irradiance. Thus, the display apparatus 20 of Figure 10 has a function of constantly maintaining the infrared radiation level to which the viewer 24 is exposed.

Generally, for infrared radiation in the wavelength

P21059-P0

- 56 -

range of 700 nm to 1100 nm, the face, which is not covered by hair or clothing, will have a relatively high reflectance. It can be made easier to control the amount of infrared radiation onto the viewer 24 by limiting the spectral sensitivity of the infrared sensor 23 to a wavelength range in the vicinity of the main wavelength of the near infrared radiation source 22 (e.g., limiting the spectral sensitivity of the infrared sensor 23 to a wavelength range in the vicinity of 880 nm when an AlGaAs LED having a peak wavelength of 880 nm is used as the near infrared radiation source 22).

Moreover, a two-dimensional imaging device such as a CCD can be used as the infrared sensor 23 to image an area in front of the display section 21. In such a case, the area of the face of the viewer 24 can be determined as an area where the brightness of reflected infrared radiation is greatest so as to obtain the irradiance of infrared radiation on the face of the viewer 24 based on the brightness of that area. In this way, it is possible to more precisely irradiate the face of the viewer 24 with a constant amount of infrared radiation.

Reference 3 reports that where the forehead of a user is irradiated with light from a red LED whose wavelength is 660 nm, it is possible to increase NK cell activity by using pulsed light at 0.5 to 13 Hz as the light with which the user is irradiated, rather than when irradiating the user with continuous constant light which is not modulated. In this regard, it is expected that it is possible to maintain/promote biofunctions by alternating or pulse-modulating at 0.5 to 13 Hz radiation in an infrared wavelength region which corresponds to the "organism window"

003020-090550

P21059-P0

- 57 -

(which more efficiently permeates into an organism to stimulate the hypothalamus in the brain) as described above with reference to Figure 4. While flashing light in the visible wavelength range around 10 Hz may cause epileptic seizure, a wavelength range corresponding to the "organism window" as described above is beyond the sensibility of the human eyes, and thus will not cause discomfort even when flashed within the field of view of the viewer 24.

10 Various display apparatus applications will now be described to which the light (radiant energy) radiation method and apparatus of the present invention can be applied.

15 In the following description of the various displays, it will be assumed that the radiation wavelength range which provides the effect of maintaining/promoting biofunctions to be 600 nm to 1100 nm. Different values may be required for the lower limit of this range depending upon the contents to be displayed on the display and/or the environment in which the display is to be used.

20 For example, a color display apparatus may use red light of a wavelength in the vicinity of 635 nm. Therefore, the lower limit of the above-described wavelength range should be 635 nm or more where radiant energy for maintaining/promoting biofunctions is radiated independently of the displayed image. In order to radiate radiant energy for maintaining/promoting biofunctions without influencing the image or the color of the surrounding environment, the lower limit of the wavelength range is set to 700 nm or more for which the sensitivity of the human eyes (visibility) is low.

00530000-070600

P21059-P0

- 58 -

A CRT display produces an image made of pixels from emission from a fluorescent substance. A fluorescent plane can be provided by using a fluorescent substance as the fluorescent substance of the CRT display, which has a main
5 emission section in the visible wavelength range and a sub emission section in a wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

10

Alternatively, a fluorescent plane can be provided by using, as the fluorescent substance of the CRT display, a fluorescent substance which is obtained by mixing together a fluorescent substance material which emits visible light
15 and another fluorescent substance material whose emission spectrum is in the wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

20

Alternatively, in a CRT display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the
25 wavelength range of 600 nm to 1100 nm can be overlapped with each other or adjacent to each other, and a part of driving energy to be supplied to the emission section for emitting light in the visible wavelength range can be supplied to the fluorescent plane for radiating radiant energy in the
30 wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can

003020"0908560

be realized by, for example, applying a fluorescent substance which radiates radiant energy in the wavelength range of 600 nm to 1100 nm around each of the fluorescent dots forming the emission section. In such a case, some of the electron beams with which the fluorescent dots are irradiated reach the fluorescent substance which radiates radiant energy in the wavelength range of 600 nm to 1100 nm due to scattering or displacement from an aimed position, thereby radiating radiant energy in the wavelength range of 600 nm to 1100 nm.

Alternatively, in a CRT display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be provided, and driving energy can be supplied to the fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm independently of the intensity of driving energy to be supplied to the emission section for emitting light in the visible wavelength range so as to radiate radiant energy in a wavelength range which permeates into an organism thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be obtained by, for example, providing a radiation source on an end surface of a phase plate for radiating radiant energy in the wavelength range of 600 nm to 1100 nm toward the center of the phase plate. In such a case, radiant energy in the wavelength range of 600 nm to 1100 nm extends across the entire surface of the phase plate while it is repeatedly reflected between the outer surface and the inner surface of the phase plate. In such a case, it is possible to radiate radiant energy in the wavelength range of 600 nm to 1100 nm

THE

P21059-P0

- 60 -

toward the viewer of the CRT display with the phase plate serving as a secondary radiation source.

A plasma display produces an image made of pixels from emission from a fluorescent substance. A fluorescent plane can be provided by using a fluorescent substance, as the fluorescent substance of the plasma display, which has a main emission section in the visible wavelength range and a sub emission section in a wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

15 Alternatively, a fluorescent plane can be provided
by using, as the fluorescent substance of the plasma display,
a fluorescent substance which is obtained by mixing together
a fluorescent substance material which emits visible light
and another fluorescent substance material whose emission
20 spectrum is in the wavelength range of 600 nm to 1100 nm
so as to radiate radiant energy in a wavelength range which
permeates into an organism, thereby maintaining/promoting
biofunctions of the user of an irradiated plane.

25 Alternatively, in a plasma display, an emission
section for producing an image made of pixels by emission
from a fluorescent substance in a visible wavelength range
and a fluorescent plane for radiating radiant energy in the
wavelength range of 600 nm to 1100 nm can be overlapped with
30 each other or adjacent to each other, and a part of driving
energy to be supplied to the emission section for emitting
light in the visible wavelength range can be supplied to
the fluorescent plane for radiating radiant energy in the

P21059-P0

- 61 -

wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be realized by, for example, applying a fluorescent substance which radiates radiant energy in the wavelength range of 600 nm to 1100 nm around each of the fluorescent dots forming the emission section. In such a case, some of the electron beams with which the fluorescent dots are irradiated reach the fluorescent substance which radiates radiant energy in the wavelength range of 600 nm to 1100 nm due to scattering or displacement from an aimed position, thereby radiating radiant energy in the wavelength range of 600 nm to 1100 nm.

Alternatively, in a plasma display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be provided, and driving energy can be supplied to the fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm independently of the intensity of driving energy to be supplied to the emission section for emitting light in the visible wavelength range so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be obtained by, for example, providing a radiation source on an end surface of a phase plate for radiating radiant energy in the wavelength range of 600 nm to 1100 nm toward the center of the phase plate. In such a case, radiant energy in the wavelength range of 600 nm to 1100 nm extends across the

00530060 070600

P21059-P0

- 62 -

entire surface of the phase plate while it is repeatedly reflected between the outer surface and the inner surface of the phase plate. In such a case, it is possible to radiate radiant energy in the wavelength range of 600 nm to 1100 nm toward the viewer of the plasma display with the phase plate serving as a secondary radiation source.

An electroluminescence (EL) display produces an image made of pixels from emission from a fluorescent substance. A fluorescent plane can be provided by using a fluorescent substance, as the fluorescent substance of the EL display, which has a main emission section in the visible wavelength range and a sub emission section in a wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

Alternatively, a fluorescent plane can be provided by using, as the fluorescent substance of the EL display, a fluorescent substance which is obtained by mixing together a fluorescent substance material which emits visible light and another fluorescent substance material whose emission spectrum is in the wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

Alternatively, in an EL display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be overlapped with

0053050.070000

P21059-P0

- 63 -

each other or adjacent to each other, and a part of driving energy to be supplied to the emission section for emitting light in the visible wavelength range can be supplied to the fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be realized by, for example, applying a fluorescent substance which radiates radiant energy in the wavelength range of 600 nm to 1100 nm around each of the fluorescent dots forming the emission section. In such a case, some of the electron beams with which the fluorescent dots are irradiated reach the fluorescent substance which radiates radiant energy in the wavelength range of 600 nm to 1100 nm due to scattering, thereby radiating radiant energy in the wavelength range of 600 nm to 1100 nm.

Alternatively, in an EL display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be provided, and driving energy can be supplied to the fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm independently of the intensity of driving energy to be supplied to the emission section for emitting light in the visible wavelength range so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be obtained by, for example, providing a radiation source on an end surface of a phase plate so as to radiate radiant energy

005020-090550

P21059-P0

- 64 -

in the wavelength range of 600 nm to 1100 nm toward the center of the phase plate. In such a case, radiant energy in the wavelength range of 600 nm to 1100 nm extends across the entire surface of the phase plate while it is repeatedly reflected between the outer surface and the inner surface of the phase plate. In such a case, it is possible to radiate radiant energy in the wavelength range of 600 nm to 1100 nm toward the viewer of the EL display with the phase plate serving as a secondary radiation source.

10

A light emitting diode (LED) display produces an image from an array of semiconductor devices each of which emits light in response to an input electric current. Such a display can be configured with LEDs whose emission spectrum includes a main emission section in the visible wavelength range and a sub emission section in a wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

20

Alternatively, an LED display can be configured with LED devices obtained by integrating together LEDs whose emission spectrum is in the visible wavelength range and LEDs whose emission spectrum is in the wavelength range of 600 nm to 1100 nm so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

25

30

Alternatively, in an LED display, an emission section for producing an image made of pixels by emission in a visible wavelength range and a fluorescent plane for

009020"0900550

P21059-P0

- 65 -

radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be overlapped with each other or adjacent to each other, and a part of driving energy to be supplied to the emission section can be supplied to the fluorescent plane so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be realized by, for example, arranging LEDs which radiates radiant energy in the wavelength range of 600 nm to 1100 nm around the LEDs which emit light in the visible wavelength range. The LEDs can be connected in series or in parallel with each other, and driven by a control current corresponding to a video signal.

15 Alternatively, in an LED display, an emission
section for producing an image made of pixels by emission
in a visible wavelength range and a radiation section for
radiating radiant energy in the wavelength range of 600 nm
to 1100 nm can be provided, and driving energy can be
20 supplied to the radiation section for radiating radiant
energy in the wavelength range of 600 nm to 1100 nm
independently of the intensity of driving energy to be
supplied to the emission section so as to radiate radiant
energy in a wavelength range which permeates into an organism,
25 thereby maintaining/promoting biofunctions of the user of
an irradiated plane. Such a configuration can be obtained
by, for example, arranging LEDs which radiates radiant
energy in the wavelength range of 600 nm to 1100 nm around
the LEDs which emit light in the visible wavelength range,
30 and applying a control current corresponding to a video
signal to the LEDs which emit light in the visible wavelength
range while applying a current independent of the control
current to the LEDs which radiate radiant energy in the

P21059-P0

- 66 -

wavelength range of 600 nm to 1100 nm.

In a spontaneous emission liquid crystal display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be provided, and driving energy can be supplied to the fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm independently of the intensity of driving energy to be supplied to the emission section which emits light in the visible wavelength range so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be obtained by, for example, arranging a radiation source on an end surface of a liquid crystal panel so as to radiate radiant energy in the wavelength range of 600 nm to 1100 nm toward the center of the liquid crystal panel. In such a case, radiant energy in the wavelength range of 600 nm to 1100 nm extends across the entire liquid crystal panel while it is repeatedly reflected between the outer surface and the inner surface of the liquid crystal panel. In such a case, it is possible to radiate radiant energy in the wavelength range of 600 nm to 1100 nm toward the viewer of the liquid crystal display with the liquid crystal panel serving as a secondary radiation source.

A spontaneous emission liquid crystal display produces an image made of pixels by splitting and modulating a spatial intensity of light in a visible wavelength range. Such a display can be provided by using a light source including radiant energy in the visible wavelength range

00530060.00000000

P21059-P0

- 67 -

and the wavelength range of 600 nm to 1100 nm. Radiant energy in the wavelength range of 600 nm to 1100 nm can be superimposed on light in the visible wavelength range which has been split and modulated for producing the image made of pixels, or transmitted through the periphery of each pixel, so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

10 A polarization film used in a liquid crystal device of such a spontaneous emission liquid crystal display is predisposed to impart a polarization effect on light in the visible wavelength range and no polarization effect on infrared radiation having a wavelength of at least 700 nm or more. Therefore, when a light source whose emission spectrum includes radiant energy in a wavelength range of 600 nm (or 635 nm) to 1100 nm in addition to the visible wavelength range is used as a back light, it is possible to irradiate the user with radiation in the wavelength range of 600 nm (or 635 nm) to 1100 nm with an intensity equal to or greater than a certain intensity irrespective of the type of image presented by spatially modulating an intensity distribution of visible light with liquid crystal.

25 In a projection liquid crystal display, an emission section for producing an image made of pixels by emission from a fluorescent substance in a visible wavelength range and a fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm can be provided, and driving energy can be supplied to the fluorescent plane for radiating radiant energy in the wavelength range of 600 nm to 1100 nm independently of the intensity of driving energy to be supplied to the emission section which emits light

005020"0900550

P21059-P0

- 68 -

in the visible wavelength range so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane. Such a configuration can be obtained by, for example, arranging a radiation source on an end surface of a liquid crystal panel so as to radiate radiant energy in the wavelength range of 600 nm to 1100 nm toward the center of the liquid crystal panel. In such a case, radiant energy in the wavelength range of 600 nm to 1100 nm extends across the entire liquid crystal panel while it is repeatedly reflected between the outer surface and the inner surface of the liquid crystal panel. In such a case, it is possible to radiate radiant energy in the wavelength range of 600 nm to 1100 nm toward the viewer of the liquid crystal display with the liquid crystal panel serving as a secondary radiation source.

A projection liquid crystal display produces an image made of pixels by splitting and modulating a spatial intensity of light in a visible wavelength range. Such a display can be provided by using a light source including radiant energy in the visible wavelength range and the wavelength range of 600 nm to 1100 nm. Radiant energy in the wavelength range of 600 nm to 1100 nm can be superimposed on light in the visible wavelength range which has been split and modulated for producing the image made of pixels, or transmitted through the periphery of each pixel, so as to radiate radiant energy in a wavelength range which permeates into an organism, thereby maintaining/promoting biofunctions of the user of an irradiated plane.

A polarization film used in a liquid crystal device of such a projection liquid crystal display is predisposed

00530060-070600

P21059-P0

- 69 -

to impart a polarization effect on light in the visible wavelength range and no polarization effect on infrared radiation having a wavelength of at least 700 nm or more. Therefore, when a light source including radiant energy in a wavelength range of 600 nm (or 635 nm) to 1100 nm in addition to the wavelength range in the visible wavelength range emission spectrum is used as a back light, it is possible to irradiate the user with radiation in the wavelength range of 600 nm (or 635 nm) to 1100 nm with an intensity equal to or greater than a certain intensity irrespective of the type of image presented by spatially modulating an intensity distribution of visible light with liquid crystal.

As described above, the present invention can be used in various types of display apparatuses to provide a display apparatus such as a computer image display apparatus, a game image display apparatus, and a television (TV) image display apparatus. Such a display apparatus is provided with a radiation source which irradiates the viewer of the computer image (in the case of a computer image display apparatus), the player of the game (in the case of a game image display apparatus), and the viewer of video images (in the case of a television image reproduction/display apparatus), with radiant energy in the wavelength range of 600 nm (or 635 nm) to 1100 nm, so as to irradiate the viewer or the player with radiant energy in a wavelength range which permeates into an organism while the viewer or the player is watching the screen (a computer image, a game image, or a video image), thereby maintaining/promoting biofunctions of the viewer or the player.

A display apparatus such as a computer image display

009020"0900560

P21059-P0

- 70 -

apparatus, a game image display apparatus, or a television image reproduction/display apparatus, can be configured to provide the viewer with a break period for maintaining/promoting biofunctions during an image pause period by changing the intensity of radiant energy in the wavelength range of 600 nm (or 635 nm) to 1100 nm if the image on the display section is not switched to another for a predetermined period of time. In such a case, a screen saver function can be obtained by automatically changing the image.

In such a display apparatus which provides the viewer with a break period for maintaining/promoting biofunctions during an image pause period, after the intensity of radiant energy in the wavelength range of 600 nm (or 635 nm) to 1100 nm is changed, if the image on the display section is not switched to another for a predetermined period of time, and when the image is switched to another thereafter, the intensity of radiant energy in this wavelength range can be returned to the previous intensity so as to regain the original state.

INDUSTRIAL APPLICABILITY

As described above, the present invention employs light (radiant energy) radiation (particularly, radiation in red to near infrared region), whereby it is possible to provide an organism in daily life with radiation in a wavelength range capable of maintaining/improving biofunctions, e.g., improving the strength of the immune system and activating the functions of the autonomic nervous system, or to maintain/improve the NK cell activity.

Particularly, the apparatus for radiating light

009020-0000550

(radiant energy) of the present invention can be configured as a general purpose illumination apparatus. By providing an illumination apparatus having such a configuration, it is possible to, for example, maintain/improve biofunctions or the NK cell activity of a person who inevitably lives or works under an artificial illumination over a long period of time and thus cannot be sufficiently exposed to daylight, or to provide a person always with a sufficient amount of radiation irrespective of the weather, the regionality, the season of the year, etc.

Alternatively, the light (radiant energy) radiation apparatus of the present invention can be provided with an image display function (display function) so that it functions as a display apparatus. For example, the light source (light radiation apparatus) of the present invention can be arranged around a screen of a display apparatus such as a TV or a computer display apparatus, so that it is possible to efficiently irradiate the face of the viewer or the worker with light in a red to near infrared region when they have their face in the vicinity of the screen as they watch TV or do work with the display. Thus, it is possible to maintain/improve biofunctions or the NK cell activity in the body of a person who watches a display over a long period of time, e.g., a person who watches TV or who does OA (Office Automation) work.

As described above, according to the present invention, it is possible to realize various effect such as irradiating an organism unobtrusively in daily life with light (radiant energy) so as to maintain/promote biofunctions and/or the NK cell activity.

SECRET

P21059-PO

- 72 -

CLAIMS

1. A radiant energy radiation apparatus, comprising means for radiating illumination light for an illumination purpose,
5 the illumination light containing radiation in a visible wavelength range and radiation in a predetermined wavelength range which permeates into an organism to maintain/promote biofunctions.
- 10 2. A radiant energy radiation apparatus according to claim 1, wherein the predetermined wavelength range is a range of 600 nm to 1100 nm.
- 15 3. A radiant energy radiation apparatus according to claim 1, wherein the predetermined wavelength range maintains/promotes the biofunctions by increasing a strength of an immune system of the organism.
- 20 4. A radiant energy radiation apparatus according to claim 1, wherein radiation in the predetermined wavelength range maintains/promotes the biofunctions by activating an autonomic nervous system.
- 25 5. A radiant energy radiation apparatus according to any one of claims 1 to 4, wherein radiation means for radiation in a visible wavelength range and radiation means for radiation in the predetermined wavelength range are integrated together.
- 30 6. A radiant energy radiation apparatus according to any one of claims 1 to 4, wherein radiation means for radiation in a visible wavelength range and radiation means for radiation in the predetermined wavelength range are

009020-0000550

P21059-P0

- 73 -

independently provided from each other.

7. A radiant energy radiation apparatus according to any one of claims 1 to 6, wherein on an irradiated plane to be irradiated with the illumination light, an irradiance at a wavelength in a range of 600 nm to 1100 nm is 0.1 W/m² or more.

8. A radiant energy radiation apparatus according to any
10 one of claims 1 to 6, wherein: radiation in the predetermined
wavelength range is radiation in a range of 600 nm to
1100 nm; and the radiation in the range of 600 nm to 1100 nm
is radiated while being pulse-modulated at 0.5 to 13 Hz.

15 9. A radiant energy radiation apparatus according to any one of claims 1 to 6, wherein on an irradiated plane to be irradiated with the illumination light, radiant energy of radiation at a wavelength in a range of 600 nm to 1100 nm is equal to or greater than 15% of radiant energy of radiation
20 at a wavelength in a visible wavelength range of 380 nm to 780 nm.

10. A radiant energy radiation apparatus according to any one of claims 1 to 6, wherein a radiant efficiency of radiation at a wavelength in a range of 600 nm to 1100 nm is equal to or greater than 0.001 W/lm.

11. A radiant energy radiation apparatus according to any one of claims 1 to 6, wherein on an irradiated plane to be irradiated with the illumination light, radiant energy of radiation at a wavelength in a range of 1100 nm to 2.5 μ m is smaller than radiant energy of radiation at a wavelength in a range of 600 nm to 1100 nm.

1. The first step in the process is to identify the problem or issue that needs to be addressed. This involves gathering information and understanding the context of the problem.

P21059-P0

- 74 -

12. A radiant energy radiation apparatus according to any one of claims 1 to 6, wherein: the illumination light has a color of light which does not cause discomfort; and a deviation (duv) of the chromaticity of light from a Planckian locus in Commission Internationale de l'Eclairage (CIE) 1960 UCS chromaticity diagram is within ± 0.01 .

13. A radiant energy radiation apparatus according to any
10 one of claims 9 to 12, wherein the apparatus has a
configuration of a discharge lamp.

14. A radiant energy radiation apparatus according claim 13,
wherein the apparatus has a configuration of a fluorescent
15 discharge lamp.

15. A radiant energy radiation apparatus according to any one of claims 9 to 12, wherein the apparatus has a configuration of an incandescent lamp.

16. A radiant energy radiation apparatus according to any one of claims 9 to 12, wherein the apparatus has a configuration of a light source including a solid light emitting device.

17. A radiant energy radiation apparatus, comprising means for radiating radiation in a predetermined wavelength range which has a low visibility for a human and which deeply permeates into an organism to maintain/promote biofunctions.

18. A radiant energy radiation apparatus according to claim 17, wherein the predetermined wavelength range is a

P21059-P0

- 75 -

range of 600 nm to 1100 nm.

19. A radiant energy radiation apparatus according to claim 17, wherein radiation in the predetermined wavelength
5 range maintains/promotes the biofunctions by increasing a strength of an immune system of the organism.

20. A radiant energy radiation apparatus according to claim 17, wherein radiation in the predetermined wavelength
10 range maintains/promotes the biofunctions by activating an autonomic nervous system.

21. A radiant energy radiation apparatus according to any one of claims 17 to 20, wherein on an irradiated plane to
15 be irradiated with radiation, an irradiance at a wavelength in a range of 700 nm to 1100 nm is 0.03 W/m² or more.

22. A radiant energy radiation apparatus according to any one of claims 17 to 20, wherein: radiation in the
20 predetermined wavelength range is radiation in a range of 700 nm to 1100 nm; and radiation in the range of 700 nm to 1100 nm is radiated while being pulse-modulated at 0.5 to 13 Hz.

23. A radiant energy radiation apparatus according to any one of claims 17 to 20, wherein on an irradiated plane to
25 be irradiated with radiation, radiant energy of radiation at a wavelength in a range of 1100 nm to 2.5 μ m is smaller than radiant energy of radiation at a wavelength in a range
30 of 700 nm to 1100 nm.

24. A radiant energy radiation apparatus according to any one of claims 21 to 23, wherein the apparatus has a

00530060-070000

P21059-P0

- 76 -

configuration of a discharge lamp.

25. A radiant energy radiation apparatus according claim 24,
wherein the apparatus has a configuration of a fluorescent
5 discharge lamp.

26. A radiant energy radiation apparatus according to any one of claims 21 to 23, wherein the apparatus has a configuration of an incandescent lamp.

10

27. A radiant energy radiation apparatus according to any one of claims 21 to 23, wherein the apparatus has a configuration of a light source including a solid light emitting device.

15

28. A radiant energy radiation apparatus according to any one of claims 17 to 27, wherein the apparatus has an illumination function of providing illumination light for an illumination purpose.

20

29. A radiant energy radiation apparatus according to any one of claims 17 to 27, wherein the apparatus has a display function of displaying a predetermined image.

25 30. A radiant energy radiation apparatus according to claim 29, wherein the predetermined image is displayed by the means for radiating radiation in the predetermined wavelength range.

30 31. A radiant energy radiation apparatus according to claim 29, further comprising display means for displaying the predetermined image, wherein the means for radiating radiation in the predetermined wavelength range is attached

THE UNIVERSITY OF CHICAGO

P21059-P0

- 77 -

to the display means.

005020"0900E550

P21059-P0

- 78 -

ABSTRACT

A radiant energy radiation apparatus includes means for radiating illumination light for an illumination purpose which includes radiation in a visible wavelength range and radiation in a predetermined wavelength range which permeates into an organism to maintain/promote biofunctions. For example, the predetermined wavelength range is a range of 600 nm to 1100 nm. With radiation in this predetermined wavelength range, it is possible to increase the strength of the immune system of an organism or to activate an autonomic nervous system so as to maintain/promote the biofunctions. The radiation means for radiation in the visible wavelength range and radiation means for radiation in the predetermined wavelength range can be integrated together. Alternatively, at least one of the radiation means for radiation in the visible wavelength range and the radiation means for radiation in the predetermined wavelength range can be provided independently.

00000000-00000000

1/10


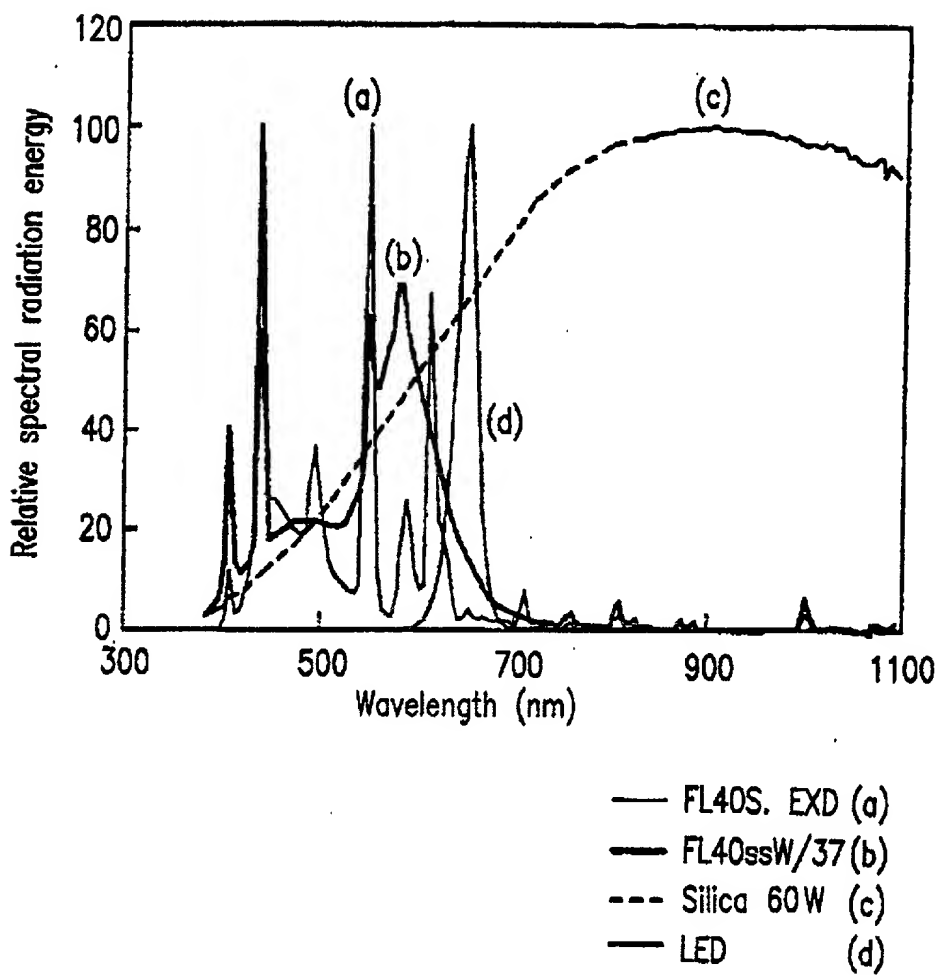
FIG. 1

FIG. 2

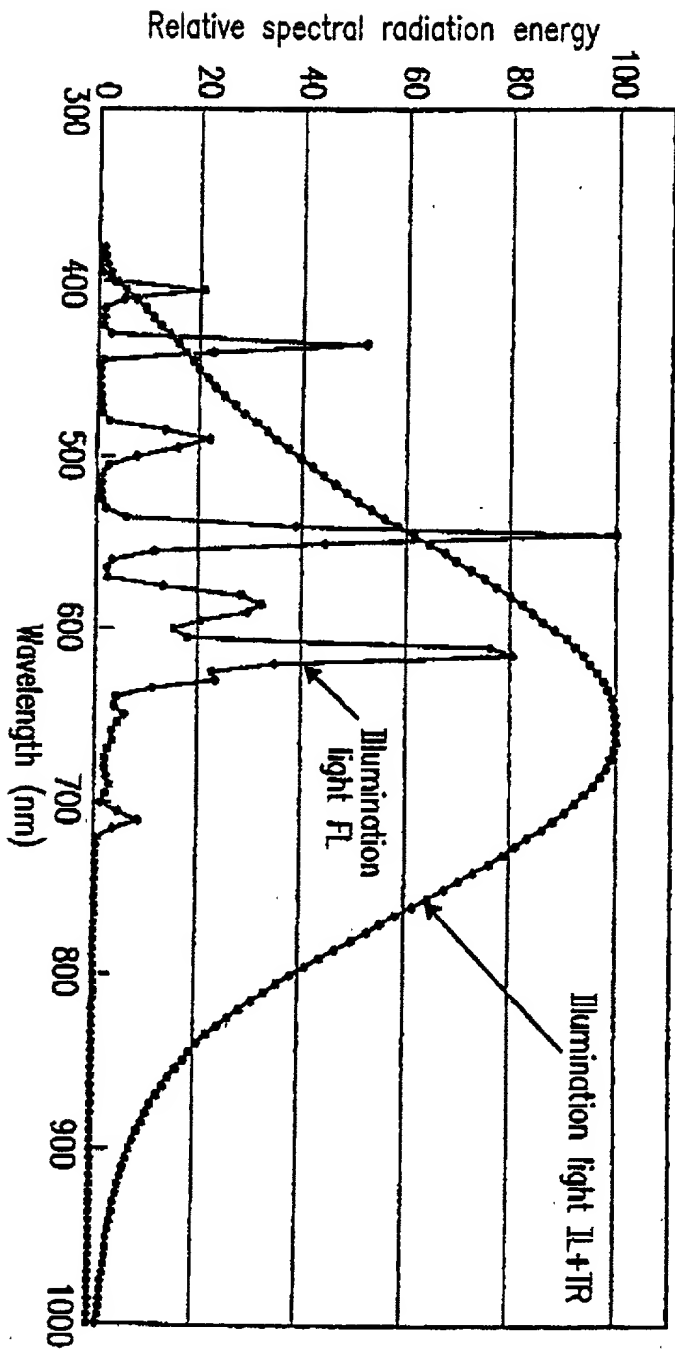

2/10

09530060.070600


09/530060

P.15/100

S. YAMAMOTO OSAKA


2000# 4月19日 22:06

FIG. 3

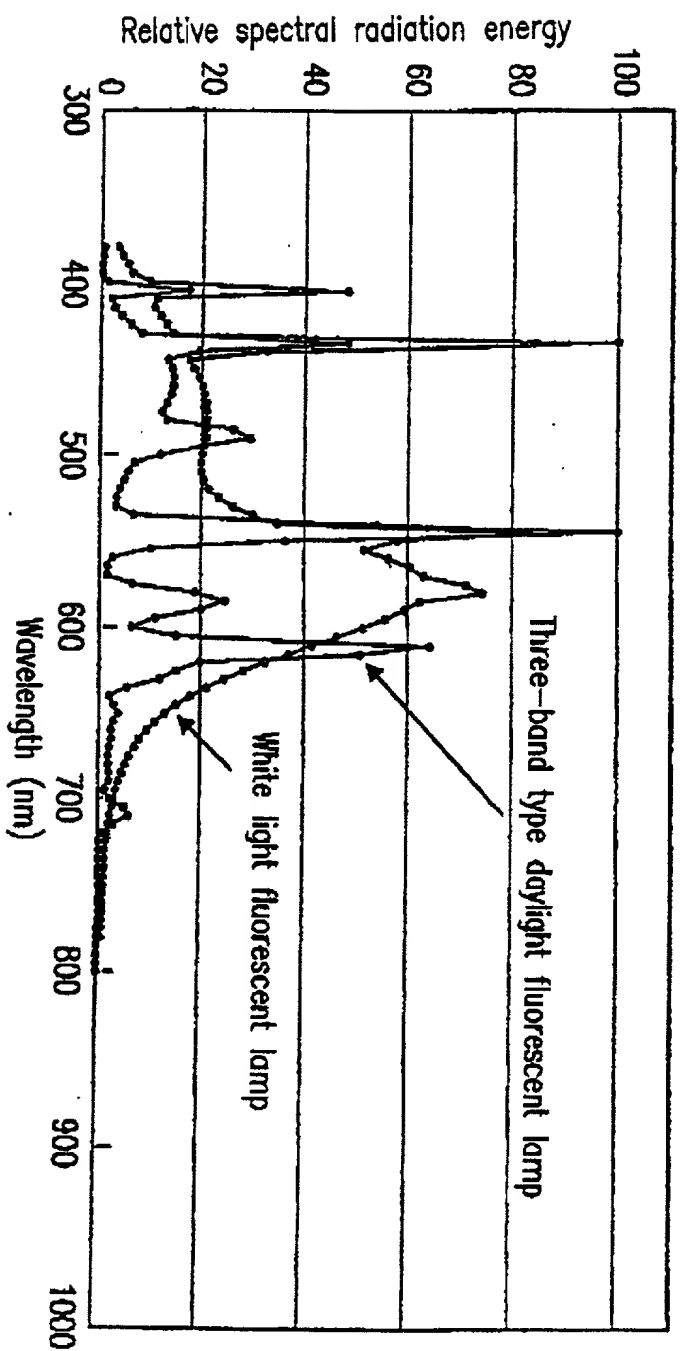

3/10

FIG. 4

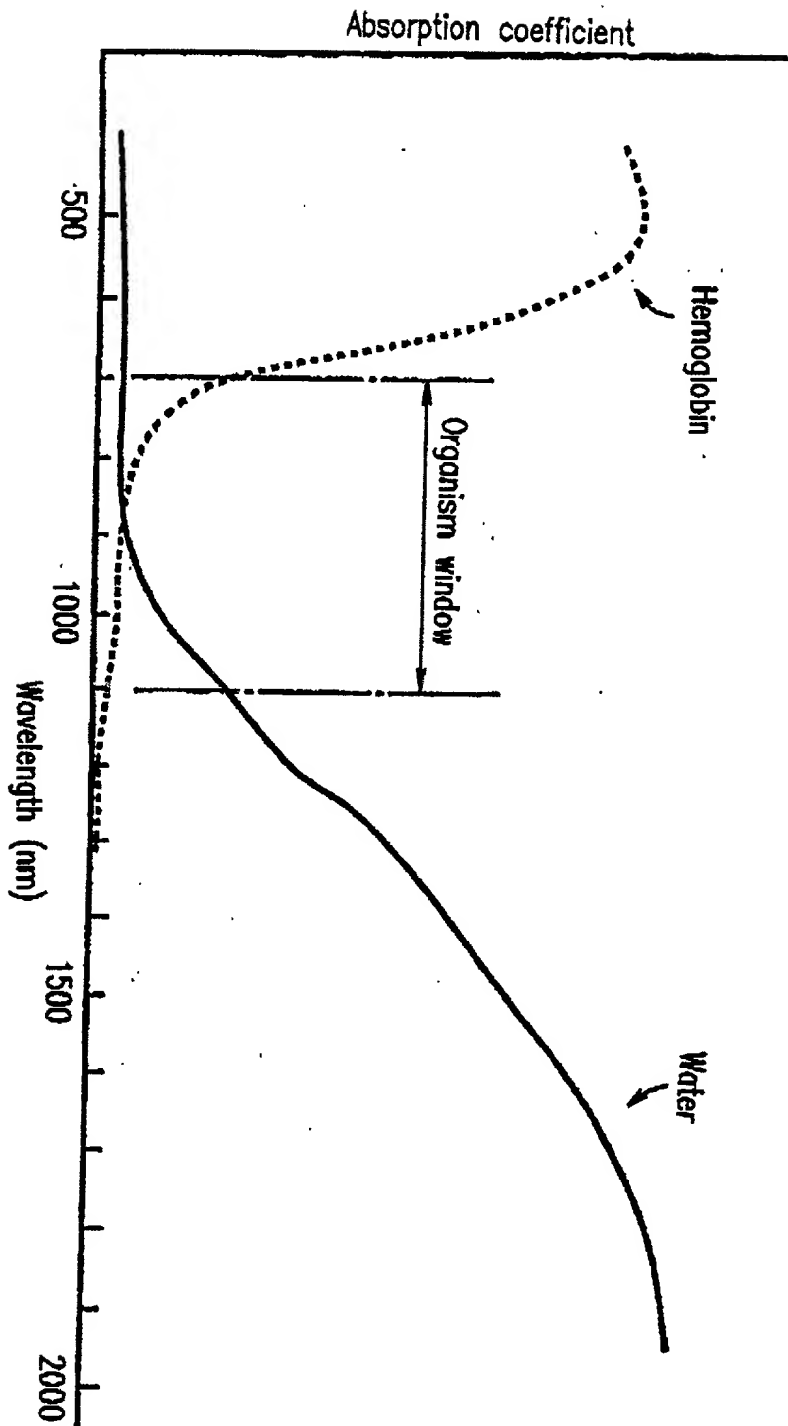

4/10

09530060, 070500


09/530060

P. 13/100

S. YAMAMOTO OSAKA

2000# 4月19日 22:06


FIG. 5

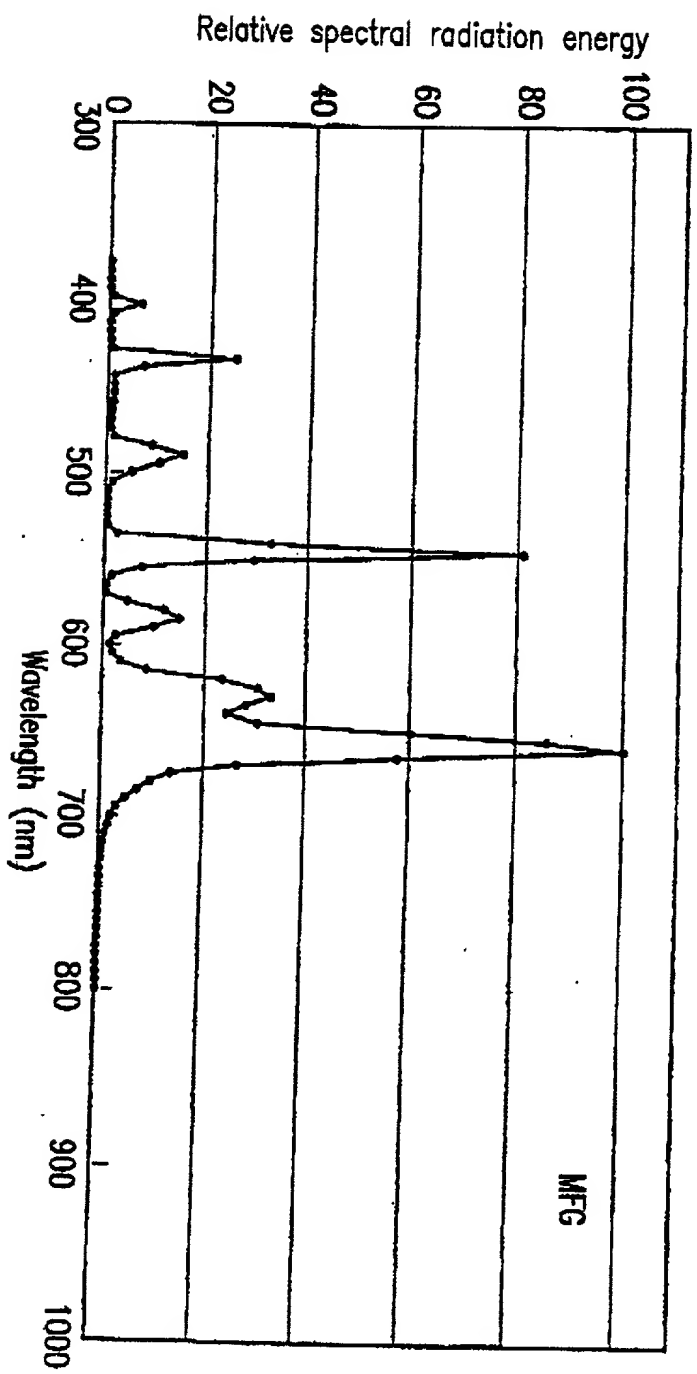

5/10

09530060, 070500

FIG. 6

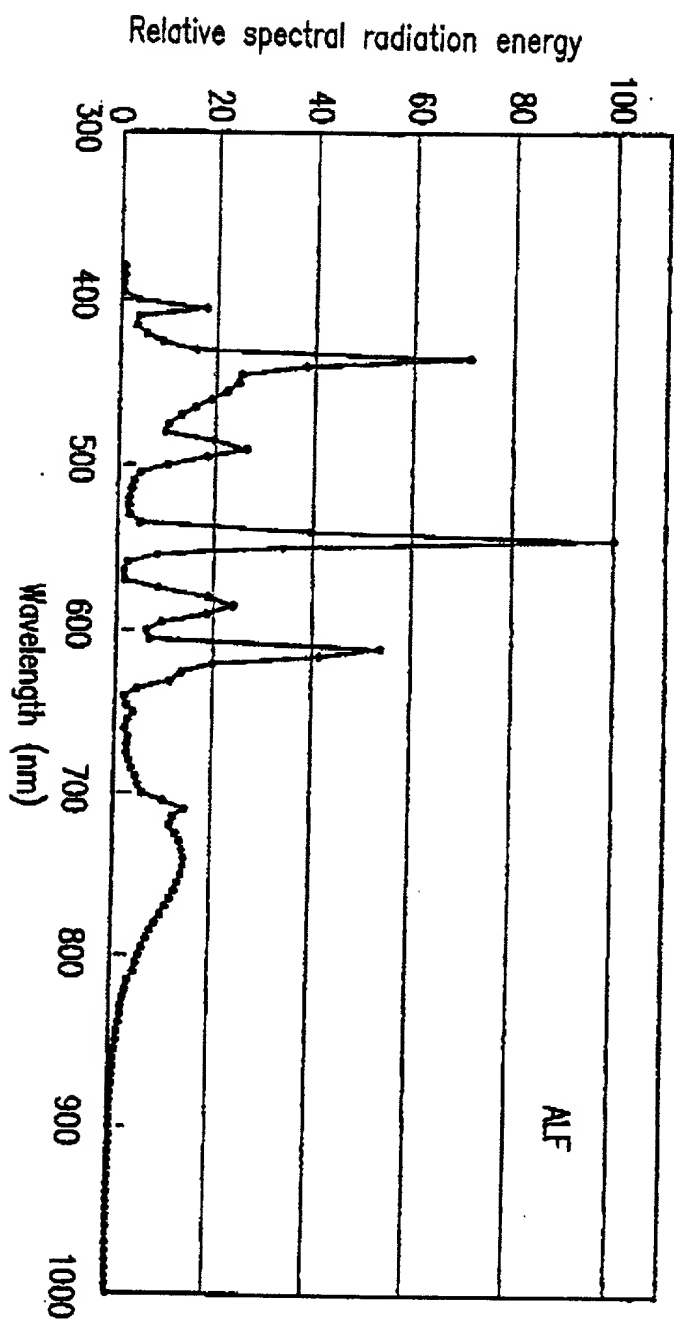


6/10

09/530060

7/10


FIG. 7

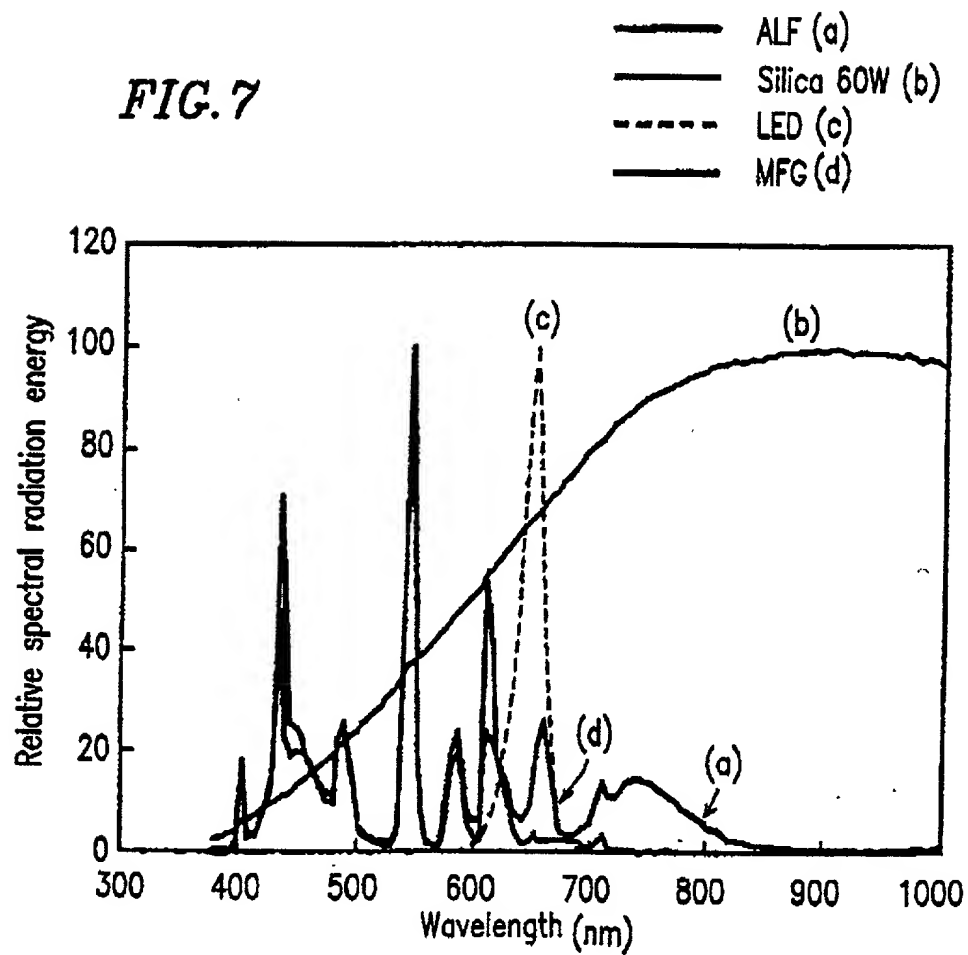

09/530060

8/10


FIG. 8

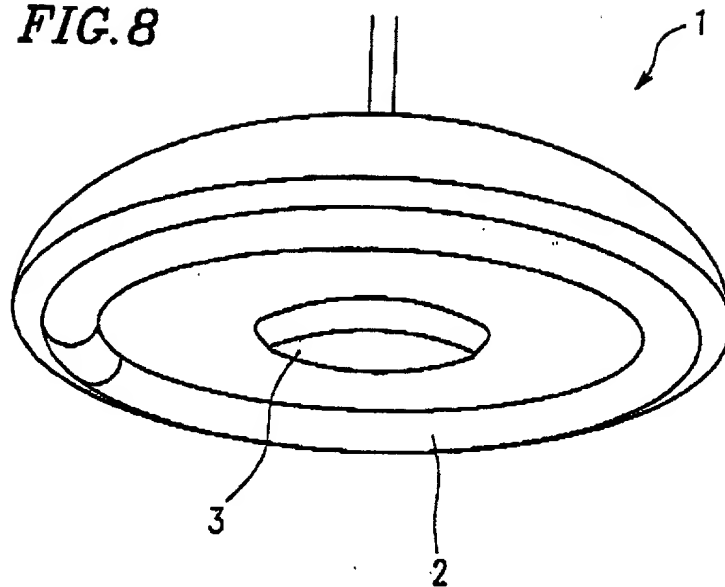

09/530060

9/10

FIG. 9

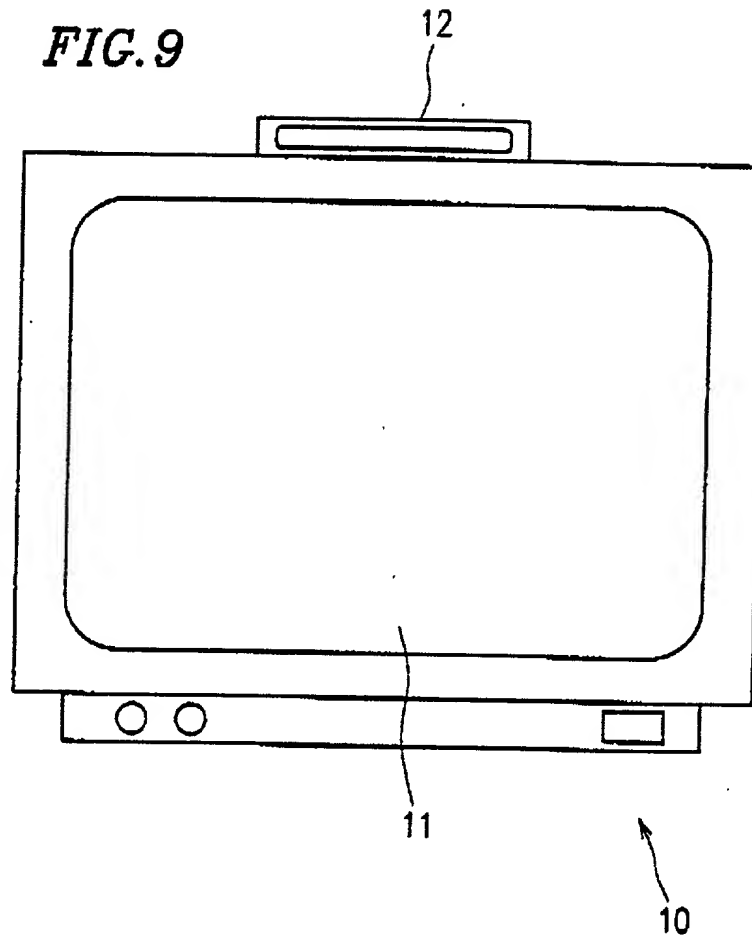

10/10

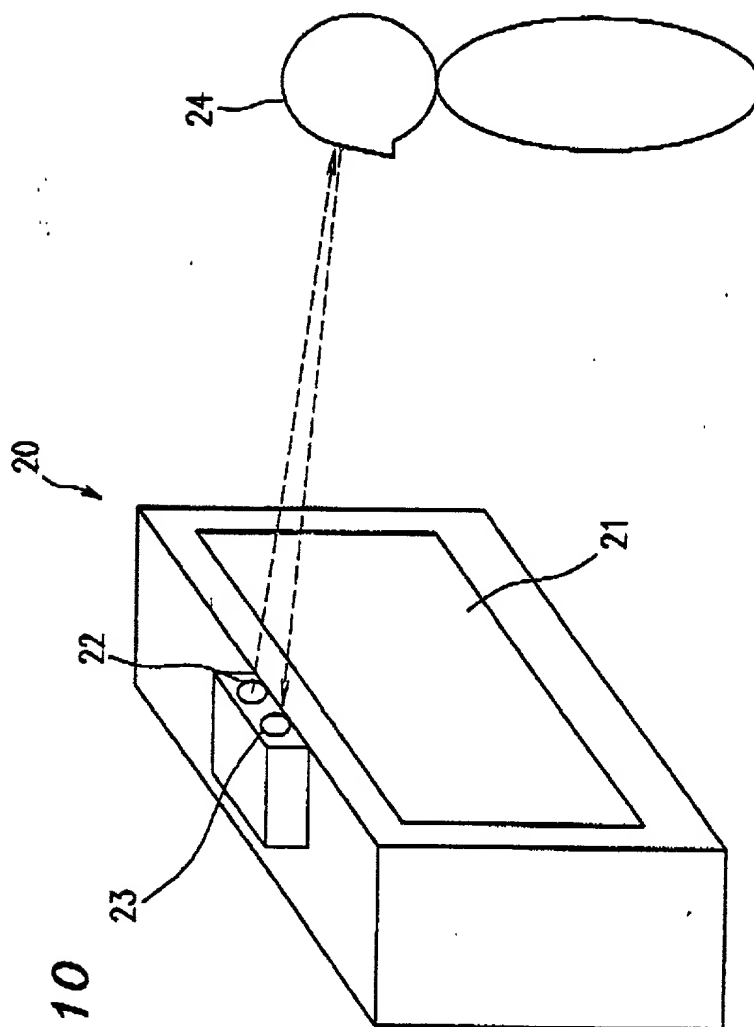


FIG. 10

009023" 0900E560

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RADIANT ENERGY RADIATION APPARATUS,

the specification of which is attached hereto unless the following box is checked:



was filed on April 21, 2000 as

United States Application Number or PCT International Application Number PCT/JP99/04507

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Not Claimed

10-235305

Japan

21/08/1998

(Number)

(Country)

(Day/Month/Year Filed)

☐

10-235306

Japan

21/08/1998

(Number)

(Country)

(Day/Month/Year Filed)

☐

10-235307

Japan

21/08/1998

(Number)

(Country)

(Day/Month/Year Filed)

☐

11-1266331

Japan

07/05/1999

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Paul F. Prestia	Reg. No. 23,031	Lawrence E. Ashery	Reg. No. 34,515	Mark J. Marcelli	Reg. No. 36,593
Allan Ratner	Reg. No. 19,717	Christopher R. Lewis	Reg. No. 36,201	Joshua L. Cohen	Reg. No. 38,040
Andrew L. Ney	Reg. No. 20,300	Robert L. Andersen	Reg. No. 25,771	Jack J. Jankovitz	Reg. No. 42,690
Kenneth N. Nigon	Reg. No. 31,549	Daniel N. Calder	Reg. No. 27,424	Jonathan H. Spadt	Reg. No. 45,122
Kevin R. Casey	Reg. No. 32,117	Louis W. Beardell, Jr.	Reg. No. 40,506	Christopher I. Halliday	Reg. No. 42,621
Benjamin E. Leace	Reg. No. 33,412	Jacques L. Etkowicz	Reg. No. 41,738		
James C. Simmons	Reg. No. 24,842	Eric A. Dichter	Reg. No. 41,708		

Address all correspondence to: Andrew L. Ney

Ratner & Prestia, Suite 301, One Westlakes, Berwyn, P.O. Box 980, Valley Forge, PA 19482-0980

Address all telephone calls to: Andrew L. Ney at (610) 407-0700.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Kazuaki OHKUBO

Inventor's signature Kazuaki Ohkubo Date June 21, 2000

Residence Osaka, Japan

Citizenship Japanese

Post Office Address 15-1-208, Miyata-cho 3-chome, Takatsuki-shi

Osaka 569-1142 Japan



Additional inventors are being named on separately numbered sheets attached hereto.

200
Full name of second joint inventor, if any (given name, family name) Kenjiro HASHIMOTO

Second Inventor's signature Kenjiro Hashimoto Date June 21, 2000

Residence Osaka, Japan JPK

Citizenship Japanese

Post Office Address 3-14-17, Taishibashi, Asahi-ku, Osaka-shi

Osaka 535-0001 Japan

300
Full name of third joint inventor, if any (given name, family name) Shiro OTAKE

Third inventor's signature Shiro Otake Date June 21, 2000

Residence Osaka, Japan JPK

Citizenship Japanese

Post Office Address 30-1-1003, Miiminami-machi, Neyagawa-shi

Osaka 572-0019 Japan

Full name of fourth joint inventor, if any (given name, family name) _____

Fourth inventor's signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full name of fifth joint inventor, if any (given name, family name) _____

Fifth inventor's signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full name of sixth joint inventor, if any (given name, family name) _____

Sixth inventor's signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____